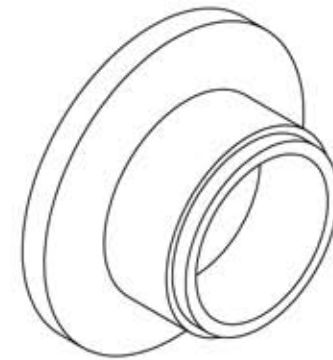
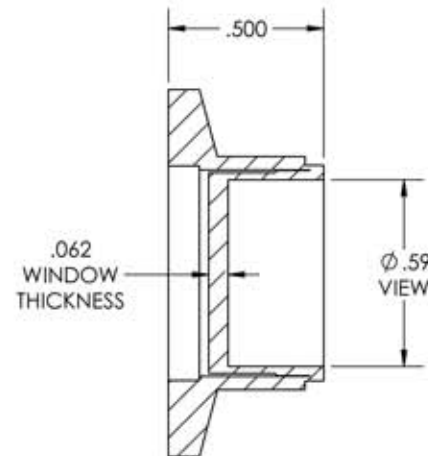
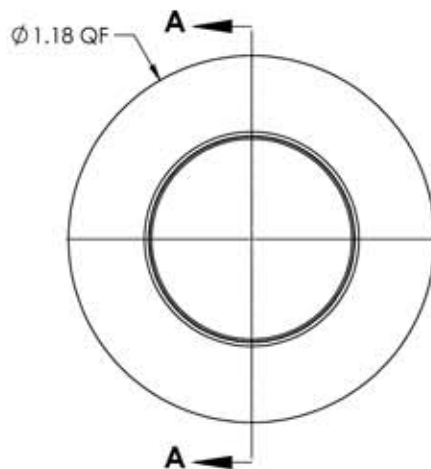


A0813-1-QF

REV
10/3/2013

SPECIFICATIONS:

1. Leak Rate: <2 X 10⁻¹⁰ atm cc/sec He
2. Parallelism: <3 Arc Minutes
3. Surface Finish: 50/20 Scratch-Dig
4. Thermal Range: -100 °C TO 450 °C
5. UV Transmission: 50% @ 250nm (External)
6. Orientation: 0-90°

UV Grade Sapphire Viewport, 0.59" View Dia,
1.18" Quick Flange

APPROVED

TITLE:
**VIEWPORT, SAPPHIRE, UV,
0.6 VIEW, QF16**

PROPRIETARY AND CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED:		MPF PRODUCTS INC.			TITLE: VIEWPORT, SAPPHIRE, UV, 0.6 VIEW, QF16		
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2 ° TWO PLACE DECIMAL THREE PLACE DECIMAL		FINISH QUICK FLANGE	DRAWN BY	JB	DATE	SIZE A	DWG. NO. A0813-1-QF	REV
				CHECKED					10/3/2013
USED ON:			DO NOT SCALE DRAWING	ENG APPR.	JB		LAST SAVED DATE	Thursday, October 03, 2013 8:34:45 AM	