
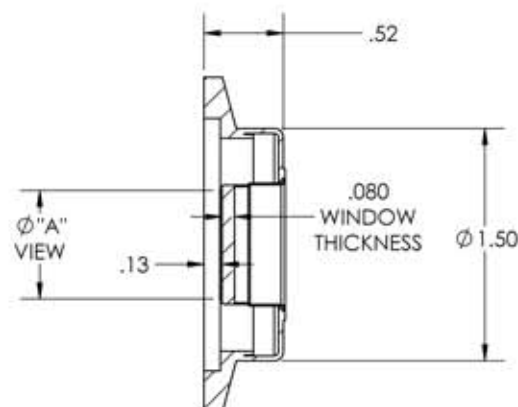


A0814

REV

10/3/2013

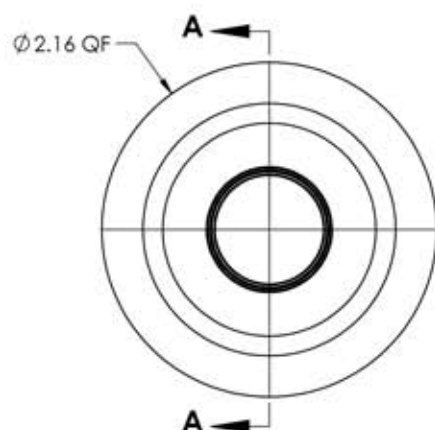

PART #	Ø "A" VIEW AREA
A0814-1-QF	.69
A0814-2-QF	.94

SPECIFICATIONS:

1. Leak Rate: <2 X 10⁻¹⁰ atm cc/sec He
2. Parallelism: <3 Arc Minutes
3. Surface Finish: 50/20 Scratch-Dig
4. Thermal Range: -100 °C TO 450 °C
5. UV Transmission: 50% @ 250nm (External)
6. Orientation: 0-90°

UV Grade Sapphire Viewport, 0.69", 0.94" View Dia,
2.16" Quick Flange

APPROVED

TITLE:

VIEWPORT, SAPPHIRE, UV,
0.69", 0.94" VIEW, QF40

PROPRIETARY AND CONFIDENTIAL				UNLESS OTHERWISE SPECIFIED:		MPF PRODUCTS INC.			0.69", 0.94" VIEW, QF40		
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.		DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH: 1/2° TWO PLACE DECIMAL THREE PLACE DECIMAL		FINISH	DRAWN BY	JB	DATE	SIZE	DWG. NO.	REV	
				QUICK FLANGE	CHECKED			A	A0814		
USED ON:				±.030 ±.015	DO NOT SCALE DRAWING	ENG APPR.	JB	LAST SAVED DATE	Thursday, October 03, 2013 7:20:00 AM		
										10/3/2013	