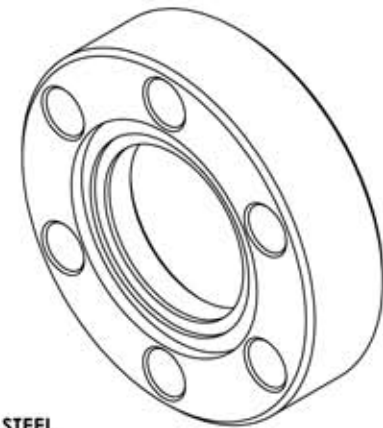
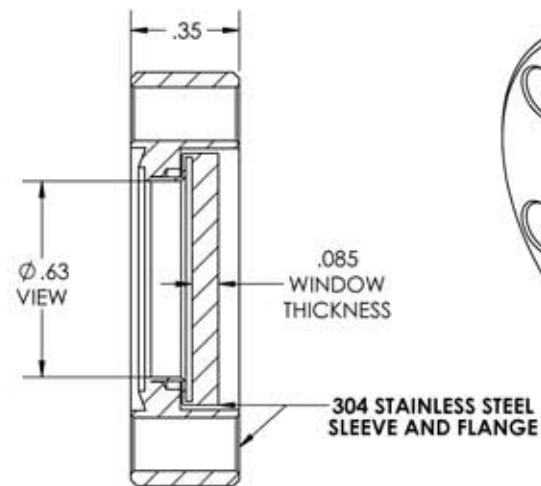
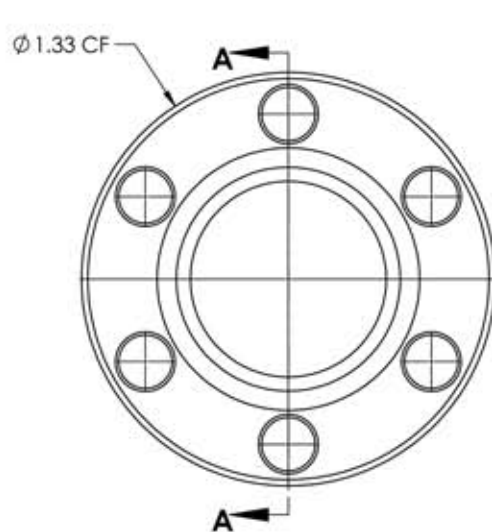


A1671-1-CF

REV
10/8/2013

NOTES:

1. Leak Rate: <2 X 10⁻¹⁰ atm/cc sec He
2. Parallelism: <30 Arc Minutes
3. Flatness: 10 Waves @ 632nm Transmitted Wavefront
4. Surface Finish: 40/20 Scratch-Dig
5. Thermal Range: -100 °C To 200 °C
6. Material: Corning HPFS 7980 Fused Silica
7. Transmission: >90% @ 250nm (External)
8. Homogeneity Grade: F
9. Inclusion Class: 2

UV Grade Fused Silica Viewport, Zero Length Profile,
0.63" View Dia, 1.33" Conflat Flange

APPROVED

TITLE:
**VIEWPORT, FUSED SILICA,
UV, 0.63" VIEW, 133CF**

PROPRIETARY AND CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED:		MPF PRODUCTS INC.					
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES:		FINISH CONFLAT	DRAWN BY	JB	DATE	SIZE	DWG. NO.	REV
							A	A1671-1-CF	10/8/2013
USED ON:	ANGULAR: MACH ± 1/2 ° TWO PLACE DECIMAL THREE PLACE DECIMAL ± .030 ± .015		DO NOT SCALE DRAWING	ENG APPR.	JB		LAST SAVED DATE	Monday, October 07, 2013 7:39:27 AM	