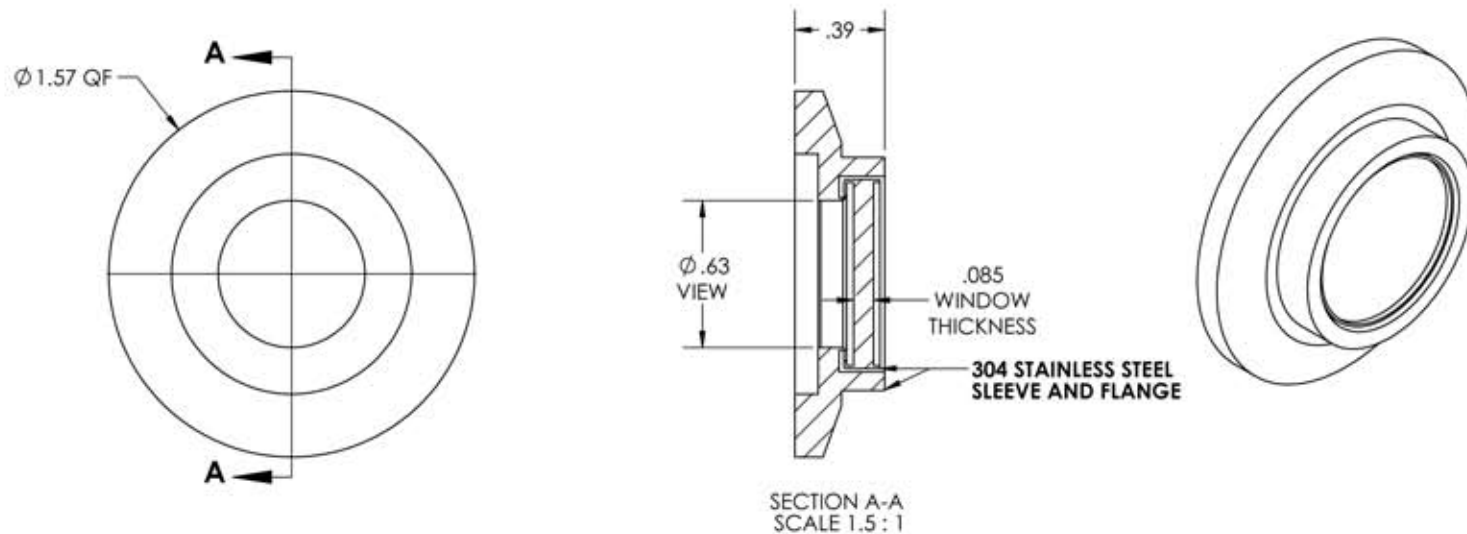


A4563-1-QF

REV  
10/8/2013

## NOTES:

1. Leak Rate: <2 X 10<sup>-10</sup> atm/cc sec He
2. Parallelism: <30 Arc Minutes
3. Flatness: 10 Waves @ 632nm Transmitted Wavefront
4. Surface Finish: 40/20 Scratch-Dig
5. Thermal Range: -100 °C To 200 °C
6. Material: Corning HPFS 7980 Fused Silica
7. Transmission: >90% @ 250nm (External)
8. Homogeneity Grade: F
9. Inclusion Class: 2

APPROVED

UV Grade Fused Silica Viewport, 0.63" View Dia, 1.57" Quick Flange

TITLE:

VIEWPORT, FUSED SILICA,  
UV, 0.6 VIEW, QF25

PROPRIETARY AND CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED:		MPF PRODUCTS INC.			UV, 0.6 VIEW, QF25							
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.		DIMENSIONS ARE IN INCHES TOLERANCES:			FINISH		DRAWN BY		JB	DATE	SIZE <b>A</b>	DWG. NO. <b>A4563-1-QF</b>	REV  10/8/2013	
USED ON:		ANGULAR: MACH ± 1/2 ° TWO PLACE DECIMAL THREE PLACE DECIMAL			QUICK FLANGE		CHECKED							
		±.030 ±.015			DO NOT SCALE DRAWING		ENG APPR.		JB		LAST SAVED DATE		Monday, October 07, 2013 7:47:42 AM	