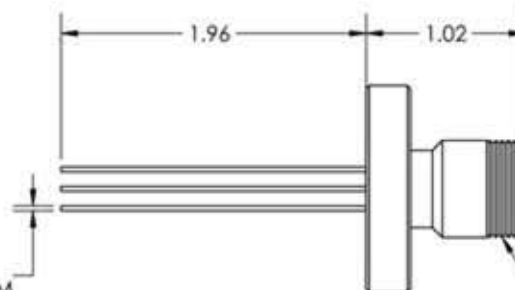


A1621-1-CF

REV

5/2/2013

Ø 1.33 C.F.

3X Ø.032
MOLYBDENUM

13/16-27 THD



APPROVED

Multipin Feedthrough, 3 Pins, 500 Volts, 3.5 Amps per Pin, 0.032" Dia Conductors,
1.33" Conflat Flange

TITLE:

MULTIPIN, 3 PIN,
500V, 3.5A, 133CF

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

USED ON:

DIMENSIONS ARE IN INCHES
TOLERANCES:

ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL



±.030
±.015

FINISH

WELDABLE

DRAWN BY

JB

DATE

CHECKED

ENG APPR.

JB

SIZE

A

DWG. NO.

A1621-1-CF

REV

5/2/2013

LAST SAVED DATE

Thursday, May 02, 2013 9:13:53 AM