


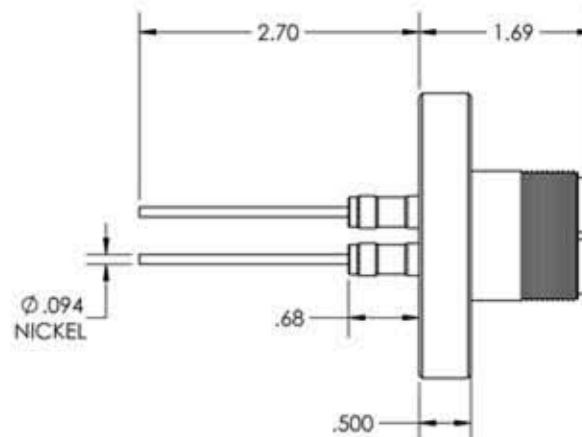


A0756-2-CF

REV

5/3/2013

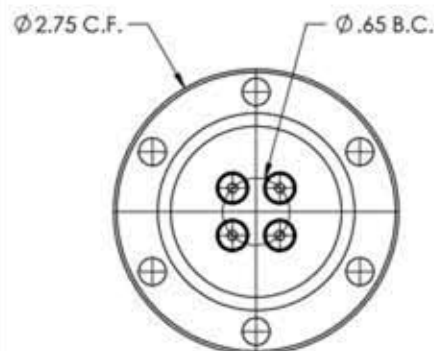

APPROVED

MS High Current Series, Multipin Feedthrough, 4 Pins, 1250 Volts, 15 Amps per Pin, 0.094" Nickel Conductors, 2.75" Conflat Flange

TITLE:

MULTIPIN, 4 PIN, 1250V, 15A, 275CF

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:

ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL



FINISH
CF FLANGE

DRAWN BY

JB

DATE

CHECKED

ENG APPR.

JB

SIZE

A

DWG. NO.

A0756-2-CF

REV

5/3/2013

LAST SAVED DATE

Tuesday, April 23, 2013 8:46:56 AM