
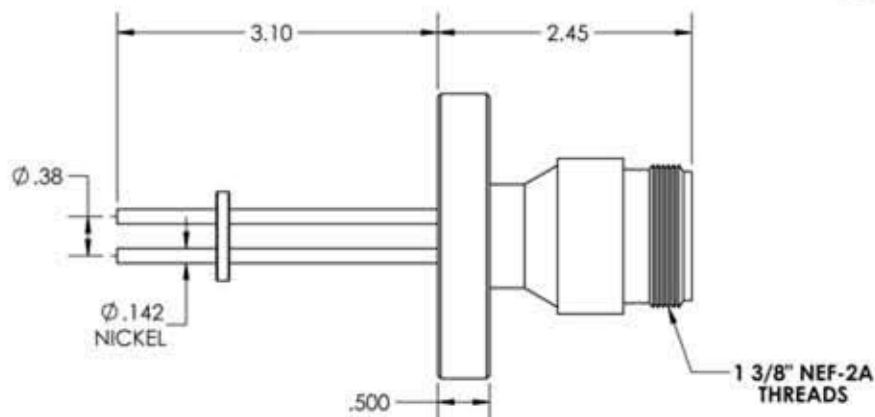


A4852-3-CF

REV

5/3/2013

Ø2.75 C.F.



APPROVED

MS High Current Series, Multipin Feedthrough, 4 Pins, 700 Volts, 25 Amps per Pin, 0.142" Nickel Conductors, 2.75" Conflat Flange

TITLE:

MULTIPIN, 4 PIN, 700V, 25A, 275CF

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

USED ON:

DIMENSIONS ARE IN INCHES
TOLERANCES:

ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL



FINISH
CF FLANGE

DRAWN BY

JB

DATE

CHECKED

JB

ENG APPR.

JB

DO NOT SCALE DRAWING

SIZE

A

DWG. NO.

A4852-3-CF

REV

5/3/2013

LAST SAVED DATE

Tuesday, April 23, 2013 9:08:38 AM