

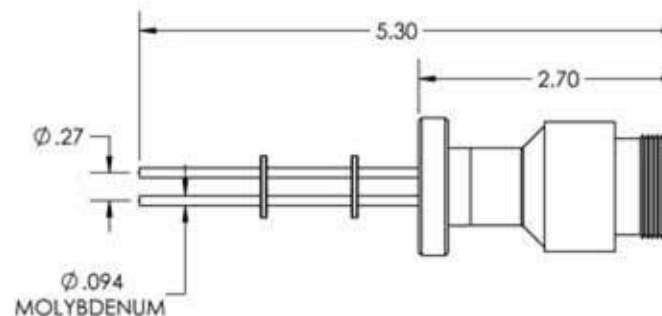



A2568-7-CF

REV
5/3/2013 ϕ 1.33 C.F.

APPROVED

MS High Current Series, Multipin Feedthrough, 4 Pins, 700 Volts, 28 Amps per Pin, 0.094"
Moly Conductors, 1.33" Conflat Flange

TITLE:

MULTIPIN, 4 PIN, 700V, 28A, 133CF

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

USED ON:

DIMENSIONS ARE IN INCHES
TOLERANCES:

ANGULAR: MACH $\pm$ 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL



FINISH
CF FLANGE

DRAWN BY

JB

DATE

CHECKED

ENG APPR.

JB

SIZE

A

DWG. NO.

A2568-7-CF

REV

5/3/2013

LAST SAVED DATE

Tuesday, April 23, 2013 9:32:10 AM