


A2277

REV

5/28/2013

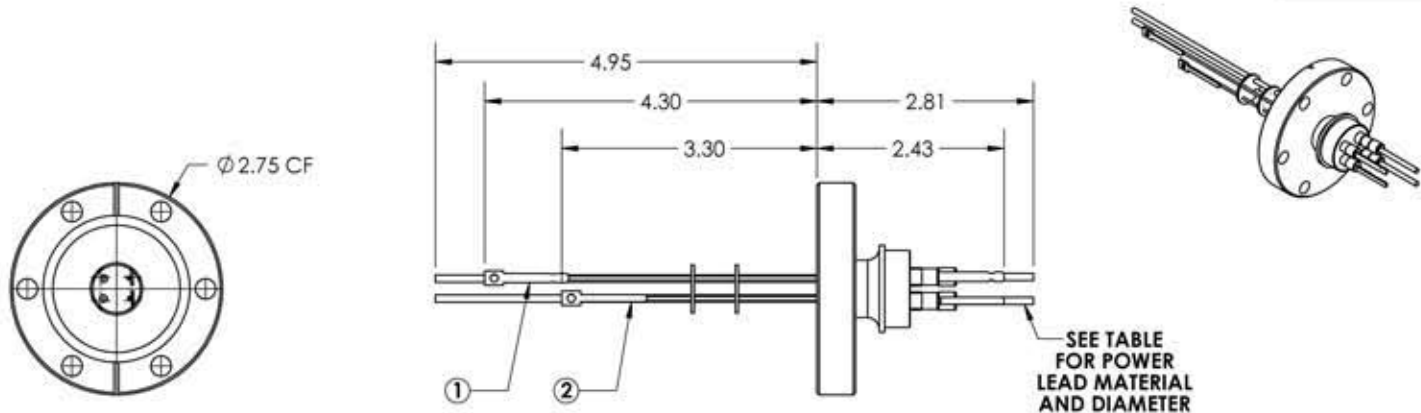

PART #	T/C TYPE	ITEM # 1 (-) LONG	ITEM # 2 (+) SHORT	POWER LEADS
A2277-1-CF	K	ALUMEL	CHROMEL	Ø .094 COPPER
A2277-2-CF	K	ALUMEL	CHROMEL	Ø .092 NICKEL
A2277-3-CF	J	CONSTANTAN	IRON	Ø .094 COPPER
A2277-4-CF	J	CONSTANTAN	IRON	Ø .092 NICKEL
A2277-5-CF	C	426	405	Ø .094 COPPER
A2277-6-CF	C	426	405	Ø .092 NICKEL
A2277-7-CF	E	CONSTANTAN	CHROMEL	Ø .094 COPPER
A2277-8-CF	E	CONSTANTAN	CHROMEL	Ø .092 NICKEL

APPROVED

Thermocouple-Power Feedthrough, 1 Pair Type J,K,C, and E, w/ Miniature TC Connector
5000 Volts, 30 Amps (Copper) 15 Amps (Nickel), 2 Pins, 2.75" CF

TITLE:
THERMOCOUPLE-POWER, TYPE K,J,C,E
1 PAIR, 5KV, 30A (COPPER) 15A (NICKEL)
2 PINS, 275CF

PROPRIETARY AND CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED:		MPF PRODUCTS INC.			PAIR, SRV, 2 PINS, 275CF		15A (NICKEL)	
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED. USED ON:		DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2 ° TWO PLACE DECIMAL THREE PLACE DECIMAL		FINISH	DRAWN BY	JB	DATE	SIZE A	DWG. NO. A2277	REV 5/28/2013
				CF FLANGE	CHECKED					
				DO NOT SCALE DRAWING	ENG APPR.	JB				
				LAST SAVED DATE		Tuesday, May 28, 2013 9:15:22 AM				



Engineering Assistance
Custom parts & modifications
Available on all parts

In-House Manufacturing
Manufactured on-site to
our high quality standards

Fast Turnaround
Quick shipping on stock parts
and quick design on custom parts

For Questions or to Order:

1-866-429-4224
MPFPI.com
sales@mpfpi.com