


A0443

REV

5/28/2013

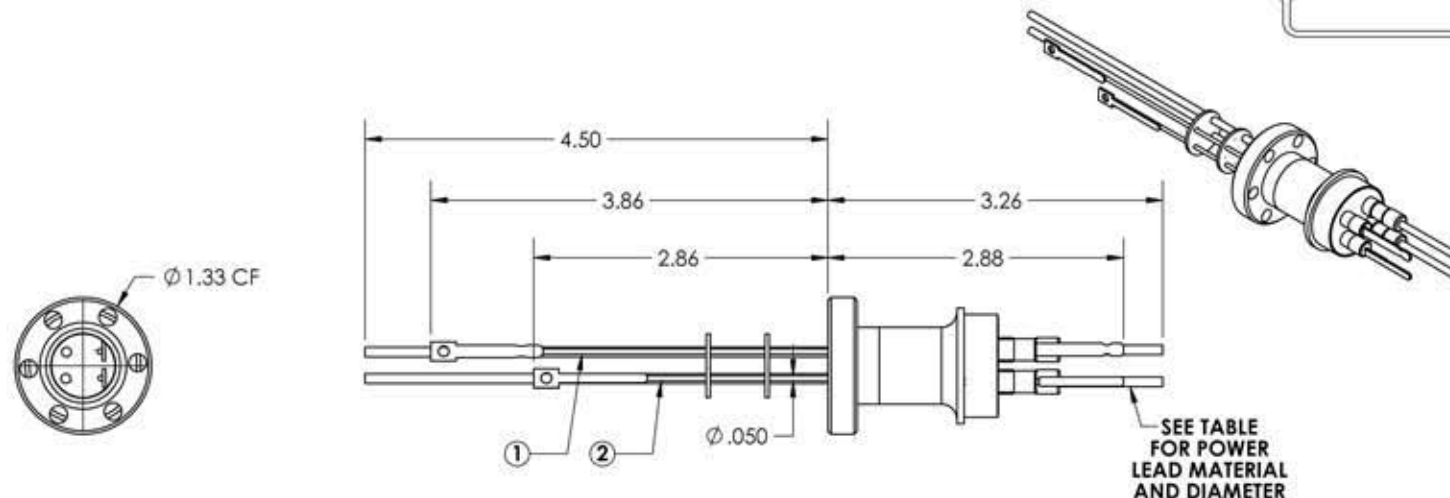

PART #	T/C TYPE	ITEM # 1 (-) LONG	ITEM # 2 (+) SHORT	POWER LEADS
A0443-1-CF	K	ALUMEL	CHROMEL	Ø .094 COPPER
A0443-2-CF	K	ALUMEL	CHROMEL	Ø .092 NICKEL
A0443-3-CF	J	CONSTANTAN	IRON	Ø .094 COPPER
A0443-4-CF	J	CONSTANTAN	IRON	Ø .092 NICKEL
A0443-5-CF	C	426	405	Ø .094 COPPER
A0443-6-CF	C	426	405	Ø .092 NICKEL
A0443-7-CF	E	CONSTANTAN	CHROMEL	Ø .094 COPPER
A0443-8-CF	E	CONSTANTAN	CHROMEL	Ø .092 NICKEL



APPROVED

Thermocouple-Power Feedthrough, 1 Pair Type J,K,C, and E, w/ Miniature TC Connector
5000 Volts, 30 Amps (Copper) 15 Amps (Nickel), 2 Pins, 1.33" CF

TITLE:

THERMOCOUPLE-POWER, TYPE K,J,C,E
1 PAIR, 5KV, 30A (COPPER) 15A (NICKEL)
2 PINS, 133CF

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

USED ON:

DIMENSIONS ARE IN INCHES
TOLERANCES:

ANGULAR: MACH ± 1/2°
TWO PLACE DECIMAL
THREE PLACE DECIMAL



FINISH
CF FLANGE

DO NOT SCALE DRAWING

DRAWN BY

JB

DATE

CHECKED

ENG APPR.

JB

SIZE

A

DWG. NO.

A0443

REV

5/28/2013

LAST SAVED DATE

Tuesday, May 28, 2013 9:13:39 AM