


A0516

REV

8/29/2013

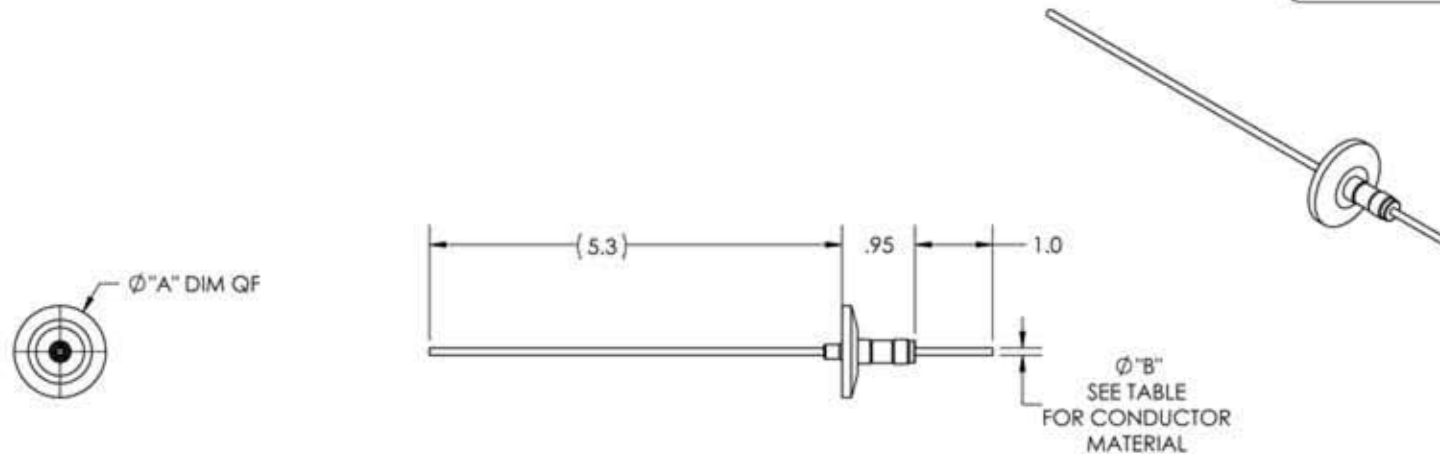

PART #	Ø "A" DIM	Ø "B" DIM	CONDUCTOR MATERIAL	AMPS
A0516-1-QF	1.18	.092	NICKEL 200	15
A0516-2-QF	1.18	.094	OFHC COPPER	50
A0516-7-QF	2.16	.092	NICKEL 200	15
A0516-8-QF	2.16	.094	OFHC COPPER	50
A0516-13-QF	1.57	.094	OFHC COPPER	50
A0516-14-QF	1.57	.092	NICKEL 200	15
A0516-15-QF	1.18	.094	MOLYBDENUM	28
A0516-16-QF	1.57	.094	MOLYBDENUM	28
A0516-17-QF	2.16	.094	MOLYBDENUM	28

APPROVED

Power Feedthrough, 5000 Volts, 1 Pin, Quick Flange

TITLE:

POWER, 5KV, 1PIN, QF

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMALFINISH
QUICK FLANGE

DRAWN BY

JB

DATE

CHECKED

JB

DO NOT SCALE DRAWING

ENG APPR.

JB

SIZE

A

DWG. NO.

A0516

REV

8/29/2013

LAST SAVED DATE

Thursday, August 29, 2013 9:30:34 AM