
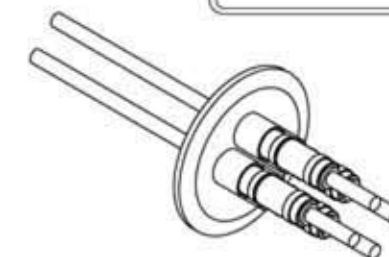
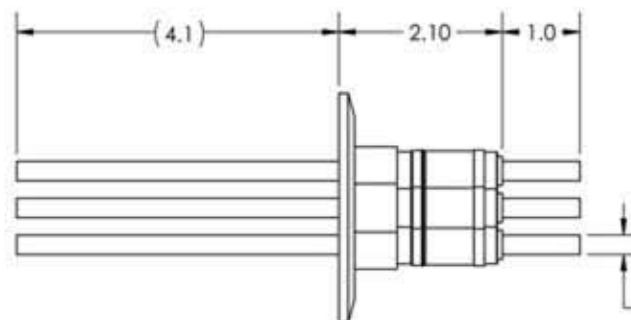


A0116

REV

8/29/2013

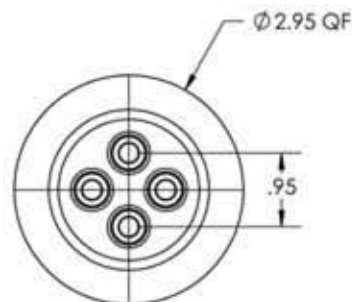

Ø .250
SEE TABLE
FOR CONDUCTOR
MATERIAL AND TYPE

PART #	CONDUCTOR TYPE	CONDUCTOR MATERIAL	AMPS
A0116-1-QF	ROD	OFHC COPPER	180
A0116-2-QF	TUBE (.032 WALL)	OFHC COPPER	N/A
A0116-3-QF	ROD	304 STN STL	7
A0116-4-QF	TUBE (.032 WALL)	304 STN STL	N/A
A0116-5-QF	ROD	NICKEL 200	55
A0116-6-QF	TUBE (.032 WALL)	NICKEL 200	N/A
A0116-7-QF	ROD	MOLYBDENUM	93

APPROVED

Power Feedthrough, 5000 Volts, 4 Pins, 0.25" Conductors, 2.95" Quick Flange

TITLE:

POWER, 5KV, 4PIN, QF50

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

USED ON:

DIMENSIONS ARE IN INCHES
TOLERANCES:

ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL



± .030
± .015

FINISH
QUICK FLANGE

DRAWN BY

JB

DATE

CHECKED

ENG APPR.

JB

DO NOT SCALE DRAWING

SIZE

A

DWG. NO.

A0116

REV

8/29/2013

LAST SAVED DATE

Tuesday, August 27, 2013 10:45:52 AM