
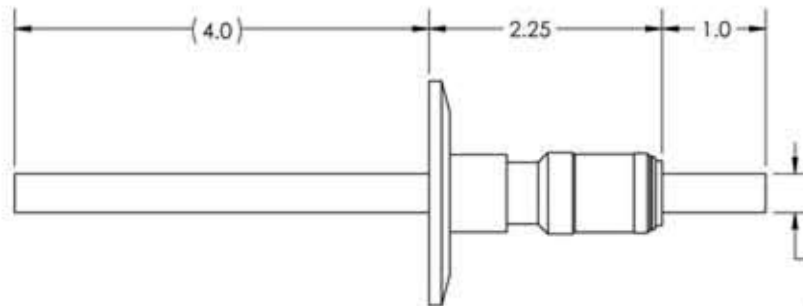


A0220

REV

8/29/2013



Ø .375
SEE TABLE
FOR CONDUCTOR
MATERIAL AND TYPE

PART #	CONDUCTOR TYPE	CONDUCTOR MATERIAL	AMPS
A0220-1-QF	TUBE (.032 WALL)	OFHC COPPER	N/A
A0220-2-QF	ROD	OFHC COPPER	300
A0220-3-QF	TUBE (.032 WALL)	NICKEL 200	N/A
A0220-4-QF	ROD	NICKEL 200	100
A0220-5-QF	TUBE (.032 WALL)	304 STN STL	N/A
A0220-6-QF	ROD	304 STN STL	20
A0220-7-QF	ROD	MOLYBDENUM	135

APPROVED

Power Feedthrough, 8000 Volts, 1 Pin, 0.38" Conductor, 2.16" Quick Flange

TITLE:

POWER, 8KV, 1PIN, QF40

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:FINISH
QUICK FLANGE

DRAWN BY

JB

DATE

SIZE
A

DWG. NO.

A0220

REV

8/29/2013

USED ON:

ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL± .030
± .015

DO NOT SCALE DRAWING

ENG APPR.

JB

LAST SAVED DATE

Tuesday, August 27, 2013 11:02:35 AM