

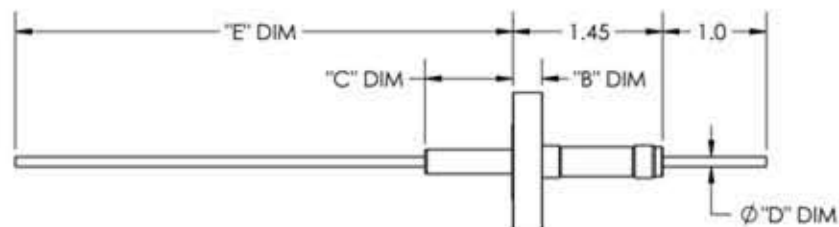


A0043

REV

8/29/2013



PART #	CONDUCTOR MATERIAL	Ø "A" DIM	"B" DIM	"C" DIM	Ø "D" DIM	"E" DIM	AMPS
A0043-1-CF	304 STN STL	1.33	.285	.84	.094	4.8	3
A0043-3-CF	NICKEL 200	1.33	.285	.84	.092	4.8	15
A0043-5-CF	OFHC COPPER	1.33	.285	.84	.094	4.8	50
A0043-7-CF	304 STN STL	2.75	.500	.63	.094	4.6	3
A0043-9-CF	NICKEL 200	2.75	.500	.63	.092	4.6	15
A0043-11-CF	OFHC COPPER	2.75	.500	.63	.094	4.6	50

APPROVED

Power Feedthrough, 10,000 Volts, 1 Pin, 1.33" / 2.75" Conflat Flange

TITLE:

POWER, 10KV, 1PIN, 133CF/275CF

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL± .030
± .015FINISH
CONFLAT

DRAWN BY

JB

DATE

CHECKED

ENG APPR.

JB

SIZE

A

DWG. NO.

A0043

REV

8/29/2013

LAST SAVED DATE

Tuesday, August 27, 2013 11:29:18 AM