


A0234

REV

9/11/2013

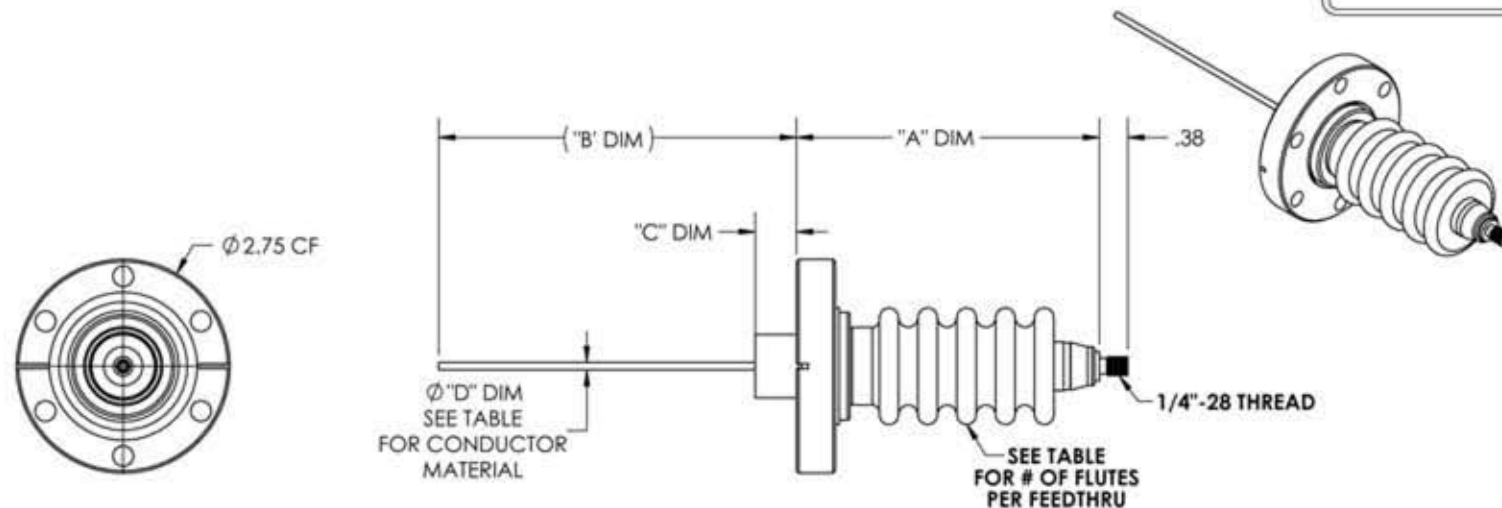

PART #	CONDUCTOR MATERIAL	"A" DIM	"B" DIM	"C" DIM	Ø "D" DIM	# OF FLUTES	VOLTAGE	AMPS
A0234-1-CF	304 STN STL	2.75	5.80	N/A	.094	3	20KV	3
A0234-2-CF	OFHC COPPER	2.75	5.80	N/A	.094	3	20KV	50
A0234-3-CF	304 STN STL	3.25	5.30	N/A	.094	4	25KV	3
A0234-4-CF	OFHC COPPER	3.25	5.30	N/A	.094	4	25KV	50
A0234-5-CF	304 STN STL	3.85	4.60	.53	.094	5	30KV	3
A0234-6-CF	OFHC COPPER	3.85	4.60	.53	.094	5	30KV	50
A0234-7-CF	NICKEL 200	3.85	4.60	.53	.092	5	30KV	15

APPROVED

Power Feedthrough, 20,000, 25,000 and 30,000Volts, 1 Pin, 2.75" Conflat Flange

TITLE:

POWER, 20, 25, AND 30KV, 1PIN, 275CF

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:FINISH
CONFLAT

DRAWN BY

JB

DATE

SIZE

A

DWG. NO.

A0234

REV

9/11/2013

USED ON:

ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL± .030
± .015

DO NOT SCALE DRAWING

ENG APPR.

JB

LAST SAVED DATE

Tuesday, September 10, 2013 10:40:19 AM