
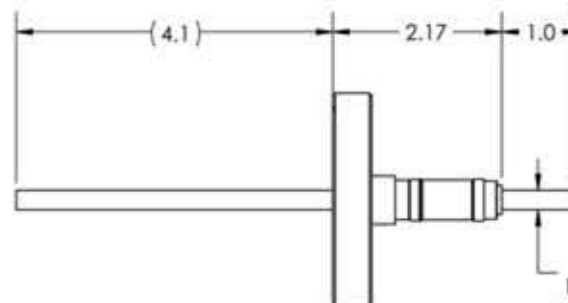



A0113

REV

8/29/2013



Ø .250
SEE TABLE
FOR CONDUCTOR
MATERIAL AND TYPE



PART #	CONDUCTOR TYPE	CONDUCTOR MATERIAL	AMPS
A0113-1-CF	ROD	OFHC COPPER	180
A0113-2-CF	TUBE (.032 WALL)	OFHC COPPER	N/A
A0113-3-CF	ROD	304 STN STL	7
A0113-4-CF	TUBE (.032 WALL)	304 STN STL	N/A
A0113-5-CF	ROD	NICKEL 200	55
A0113-6-CF	TUBE (.032 WALL)	NICKEL 200	N/A
A0113-7-CF	ROD	MOLYBDENUM	93

APPROVED

Power Feedthrough, 5000 Volts, 1 Pin, 0.25" Conductor, 2.75" Conflat Flange

TITLE:

POWER, 5KV, 1PIN, 275CF

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL± .030
± .015FINISH
CONFLAT

DRAWN BY

JB

DATE

CHECKED

JB

DO NOT SCALE DRAWING

ENG APPR.

JB

SIZE

A

DWG. NO.

A0113

REV

8/29/2013

LAST SAVED DATE

Monday, August 26, 2013 11:39:23 AM