
## **SHEET 1 OF 1 SHEETS**

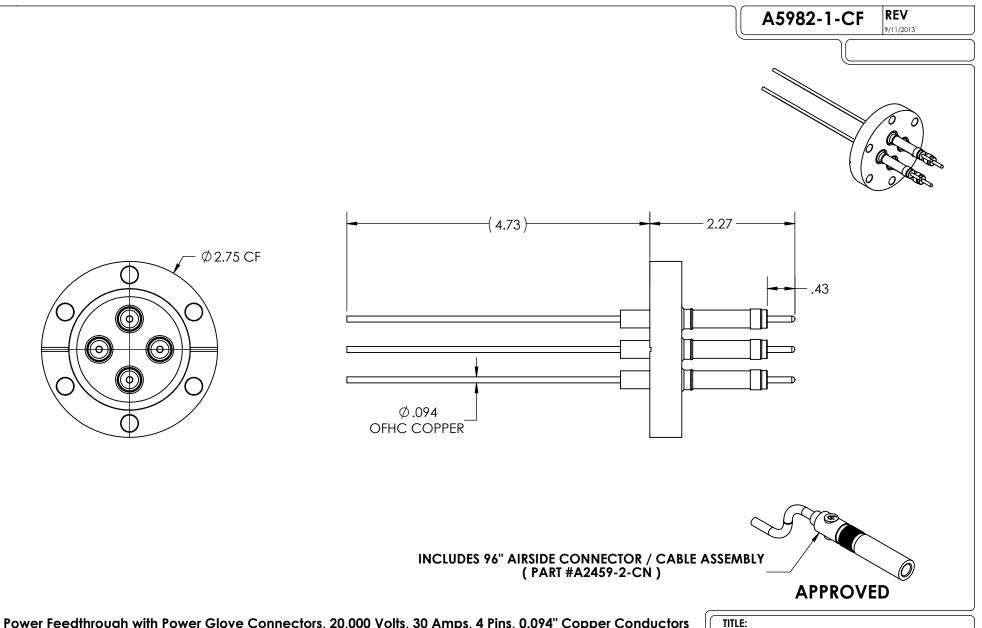

Power Feedthrough with Power Glove Connectors, 20,000 Volts, 30 Amps, 4 Pins, 0.094" Copper Conductors 2.75" Conflat Flange

POWER GLOVE, 20KV, 30A, 4PIN, 275CF **UNLESS OTHERWISE SPECIFIED:** MPF PRODUCTS INC. PROPRIETARY AND CONFIDENTIAL SIZE DWG. NO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE DATE **REV** FINISH **DIMENSIONS ARE IN INCHES** DRAWN BY WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED. JB A5982-1-CF TOLERANCES: **CONFLAT** USED ON: CHECKED 9/11/2013 ANGULAR: MACH ± 1/2 ° TWO PLACE DECIMAL LAST SAVED DATE Wednesday, September 11, 2013 7:07:54 AM DO NOT SCALE DRAWING ENG APPR. JB THREE PLACE DECIMAL