
SHEET 1 OF 1 SHEETS

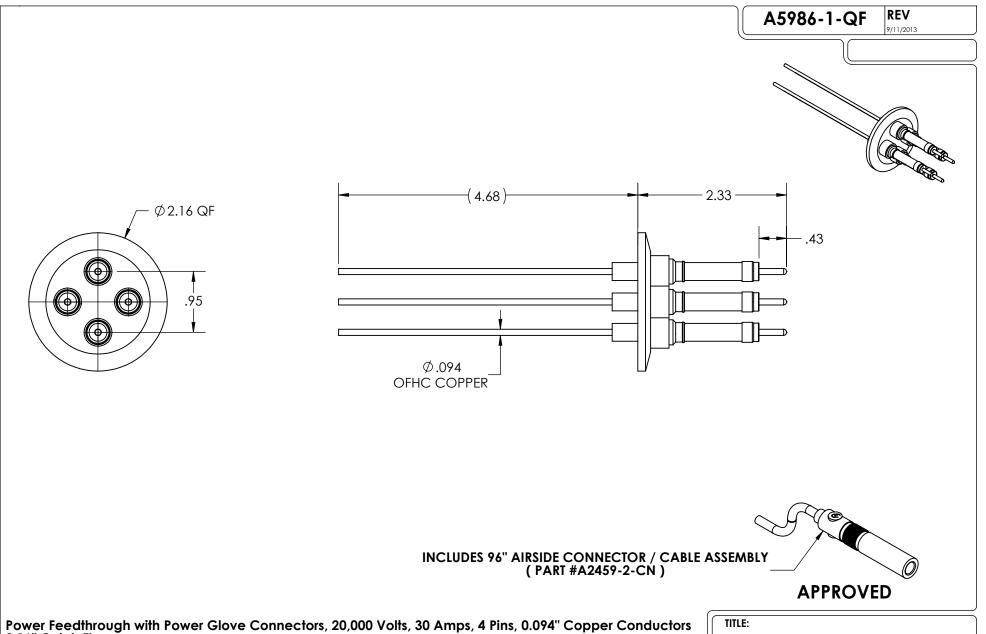

Power Feedthrough with Power Glove Connectors, 20,000 Volts, 30 Amps, 4 Pins, 0.094" Copper Conductors 2.16" Quick Flange

DIMENSIONS ARE IN INCHES

ANGULAR: MACH ± 1/2 ° TWO PLACE DECIMAL

THREE PLACE DECIMAL

TOLERANCES:

PROPRIETARY AND CONFIDENTIAL

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE

WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

USED ON:

POWER GLOVE, 20KV, 30A, 4PIN, QF40 **UNLESS OTHERWISE SPECIFIED:** MPF PRODUCTS INC. SIZE DWG. NO. DATE **REV** FINISH DRAWN BY JB A5986-1-QF **QUICK FLANGE** CHECKED 9/11/2013 LAST SAVED DATE Wednesday, September 11, 2013 7:07:19 AM DO NOT SCALE DRAWING ENG APPR. JB