
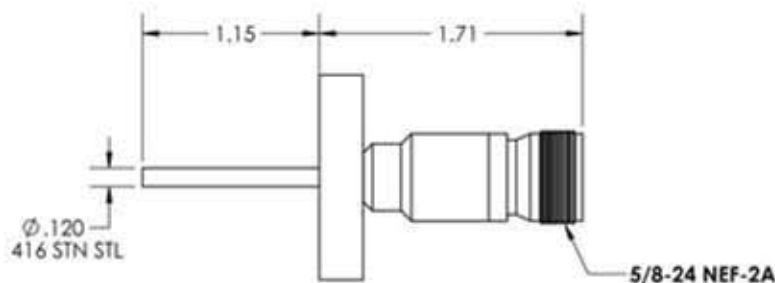


A2714

REV

11/8/2013

Ø "A" DIM



NOTES:
 MATCHED IMPEDANCE
 1500 VOLTS PEAK
 MAXIMUM VSWR= DC TO 6 GHz
 $1.06 + .14f$ (F= FREQUENCY IN GHz)

PART#	AIRSIDE CONNECTOR	"A" DIM
A2714-1-CF	YES	Ø 1.33
A2714-2-CF	N/A	Ø 1.33
A2714-3-CF	YES	Ø 2.75
A2714-4-CF	N/A	Ø 2.75



APPROVED

Type-N Coaxial Feedthrough, 50 Ohm Matched Impedance,
 1 Pin, Grounded Shield, 1.33, 2.75" Conflat Flange

TITLE: COAXIAL, TYPE-N, 50
 OHM, 1 PIN, GROUNDED
 SHIELD, 133CF, 275CF

PROPRIETARY AND CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED:		MPF PRODUCTS INC.				CHM, 1 FIN, GROUNDED SHIELD, 133CF, 275CF			
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.		DIMENSIONS ARE IN INCHES TOLERANCES:			FINISH	DRAWN BY	JB	DATE	SIZE A	DWG. NO. A2714	REV
USED ON:		ANGULAR: MACH: 1/2" TWO PLACE DECIMAL THREE PLACE DECIMAL			CONFLAT	CHECKED					
					DO NOT SCALE DRAWING	ENG APPR.	JB		LAST SAVED DATE	Thursday, November 07, 2013 11:21:03 AM	