
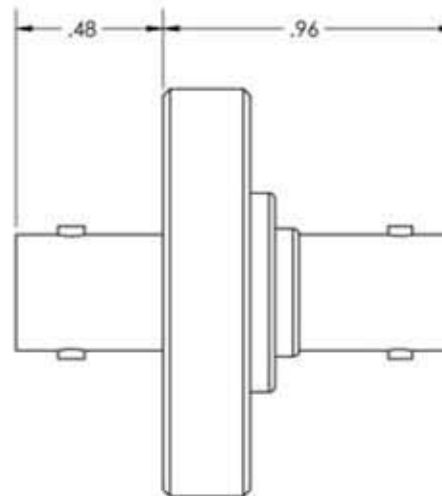


A12380-1-CF REV

11/18/2013

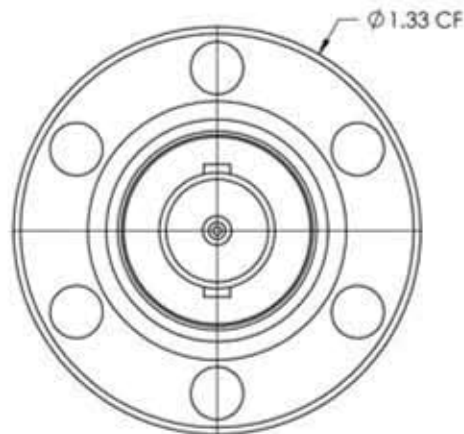

NOTES:

1. 50 OHM MATCHED IMPEDANCE FEEDTHRU
2. FREQUENCY: 4 GHz
3. VOLTAGE RATING: 500V DC (LIMITED BY PLUG)
4. CURRENT RATING: 3 AMPS
5. TEMPERATURE RATING: -200 °C TO 300 °C
6. AIRSIDE CONNECTORS ARE INCLUDED

APPROVED

BNC Coaxial Double Ended Feedthrough, 1 Pin, Matched Impedance @ 50 OHM, 1.33" Conflat Flange

TITLE:

COAXIAL, DOUBLE ENDED BNC,
MATCHED IMPEDANCE @ 50 OHM,
CF16

PROPRIETARY AND CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED:		MPF PRODUCTS INC.		SIZE		DWG. NO.		REV	
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.		DIMENSIONS ARE IN INCHES TOLERANCES:		FINISH		DRAWN BY		DATE		A	
USED ON:		ANGULAR: MACH: 1/2" TWO PLACE DECIMAL THREE PLACE DECIMAL		MINI CONFLAT		WJ		10/29/2013		A12380-1-CF	
				DO NOT SCALE DRAWING		WJ		10/29/2013		LAST SAVED DATE	
						WJ		10/29/2013		Wednesday, November 13, 2013 4:44:17 PM	