
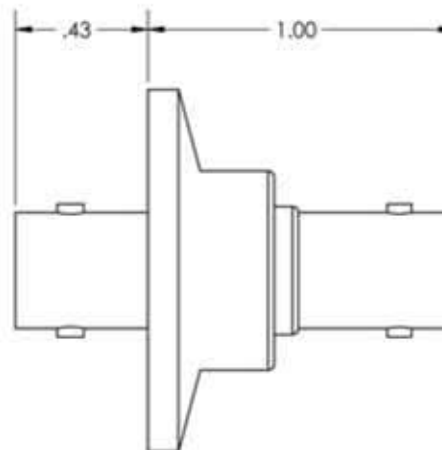


A12409-1-QF REV

11/18/2013

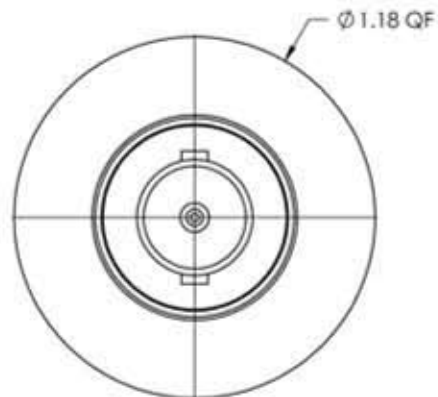

NOTES:

1. 50 OHM MATCHED IMPEDANCE FEEDTHRU
2. FREQUENCY: 4 GHz
3. VOLTAGE RATING: 500V DC (LIMITED BY PLUG)
4. CURRENT RATING: 3 AMPS
5. TEMPERATURE RATING: -200 °C TO 300 °C
6. AIRSIDE CONNECTORS ARE INCLUDED

APPROVED

BNC Coaxial Double Ended Feedthrough, 1 Pin, Matched Impedance @ 50 OHM, 1.18" Quick Flange

TITLE:
COAXIAL, DOUBLE ENDED BNC,
MATCHED IMPEDANCE @ 50 OHM,
QF16

PROPRIETARY AND CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED:		MPF PRODUCTS INC.			MATCHED IMPEDANCE @ 50 OHM QF16				
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.		DIMENSIONS ARE IN INCHES TOLERANCES:			FINISH	DRAWN BY	JB	DATE	SIZE	DWG. NO.	REV
USED ON:		ANGULAR: MACH: 1/2" TWO PLACE DECIMAL THREE PLACE DECIMAL			QUICK FLANGE	CHECKED			A	A12409-1-QF	11/18/2013
		±.030 ±.015		DO NOT SCALE DRAWING	ENG APPR.	JB			LAST SAVED DATE	Wednesday, November 13, 2013 4:54:16 PM	