
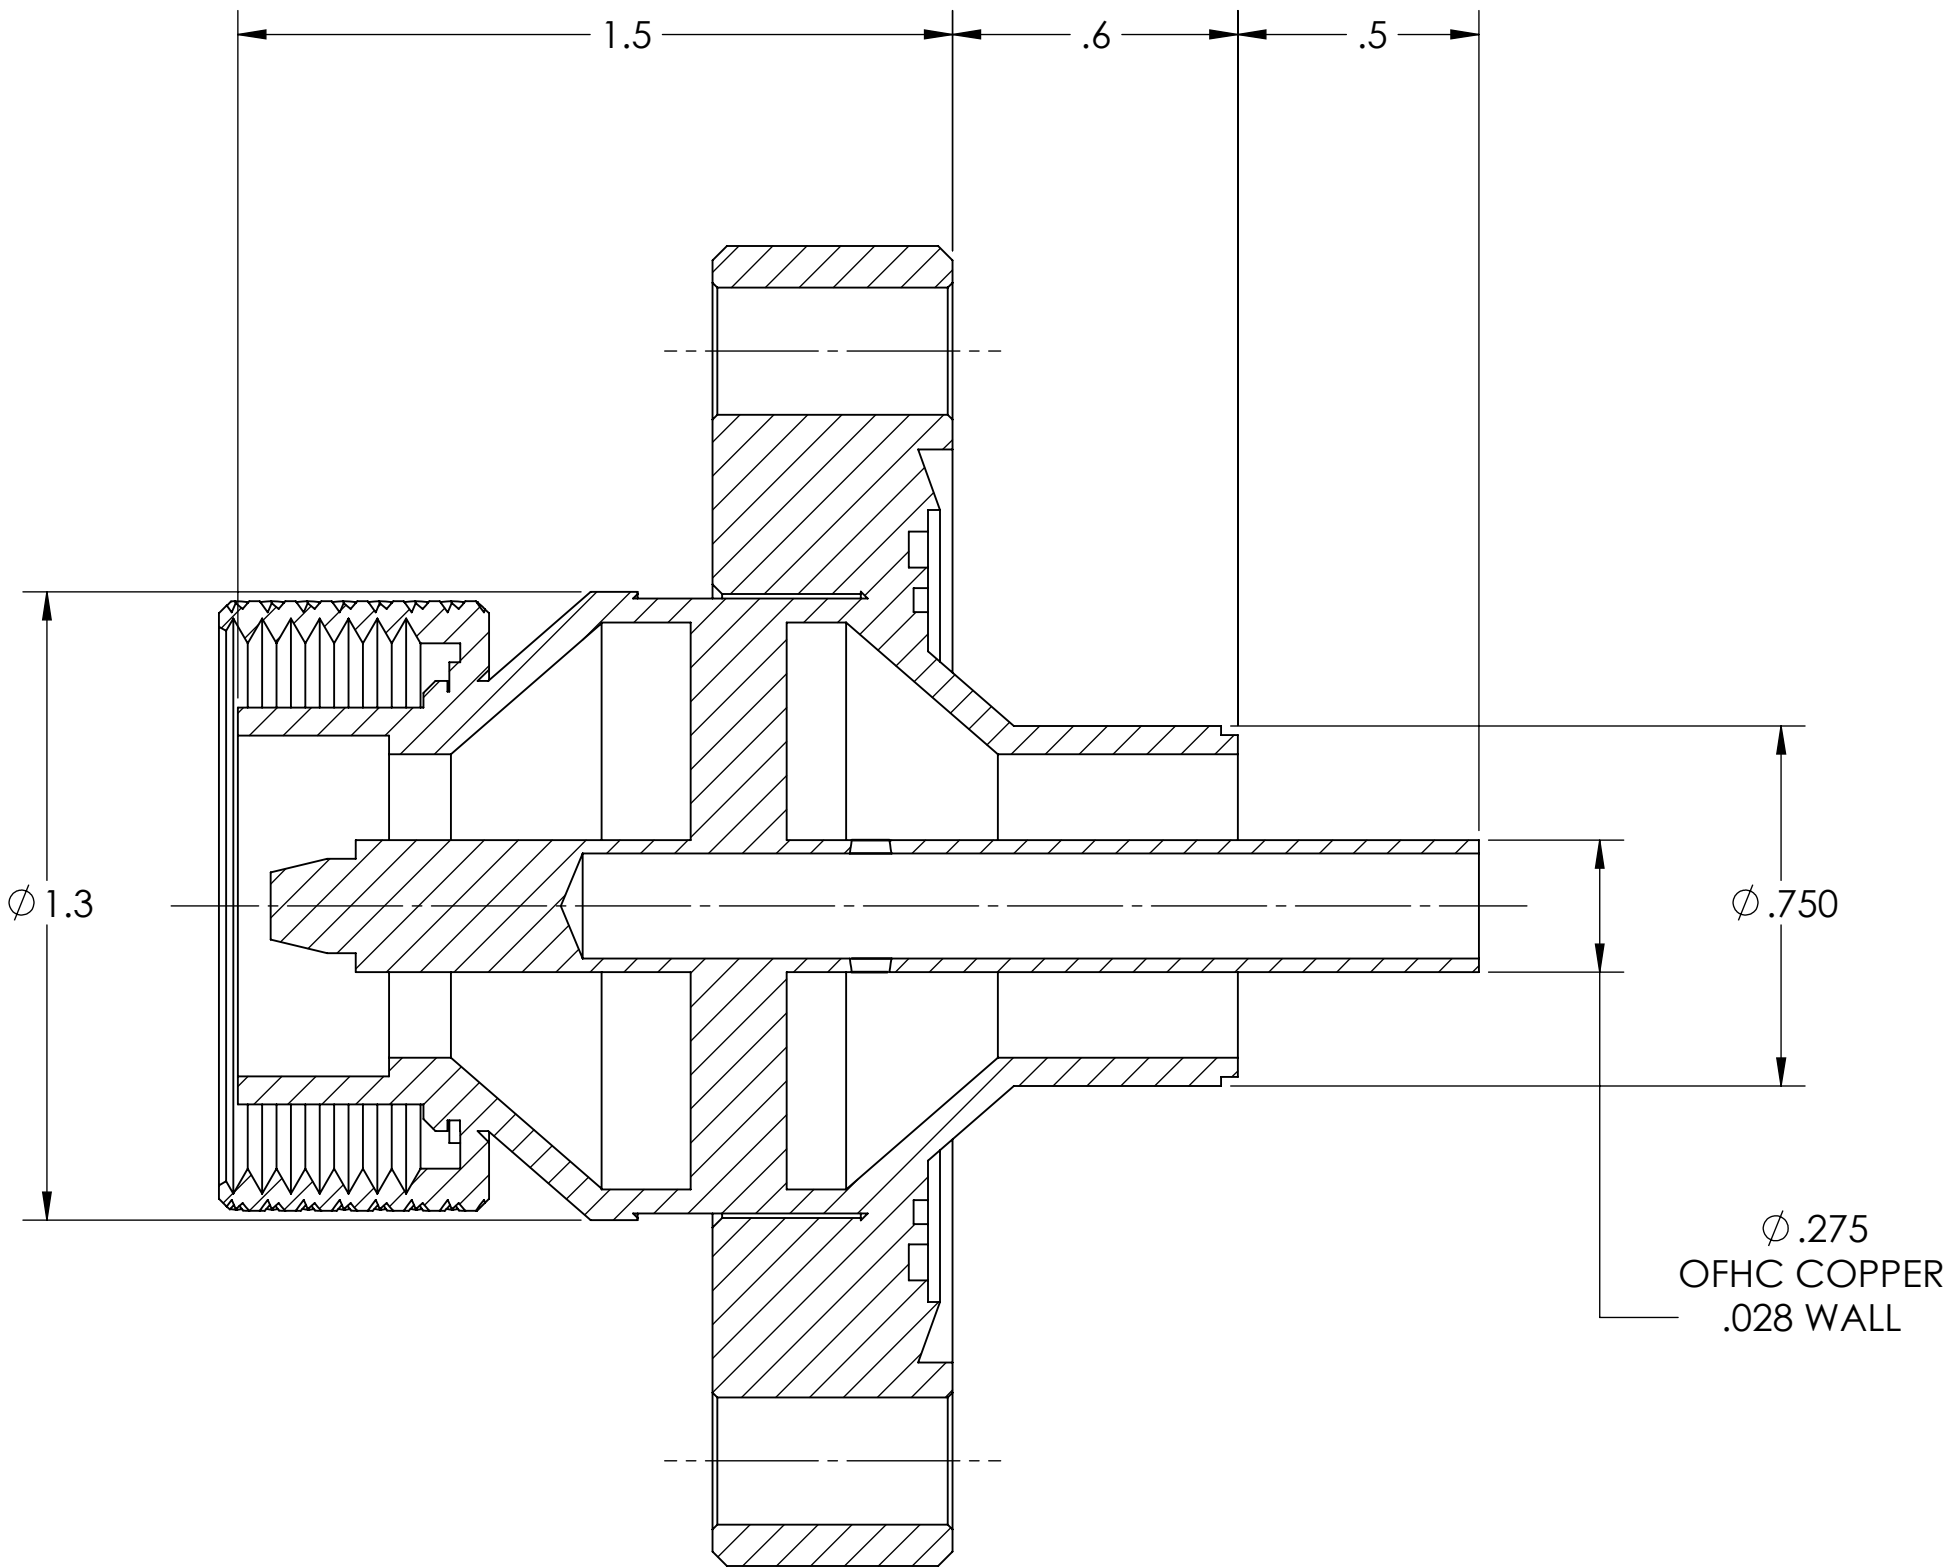
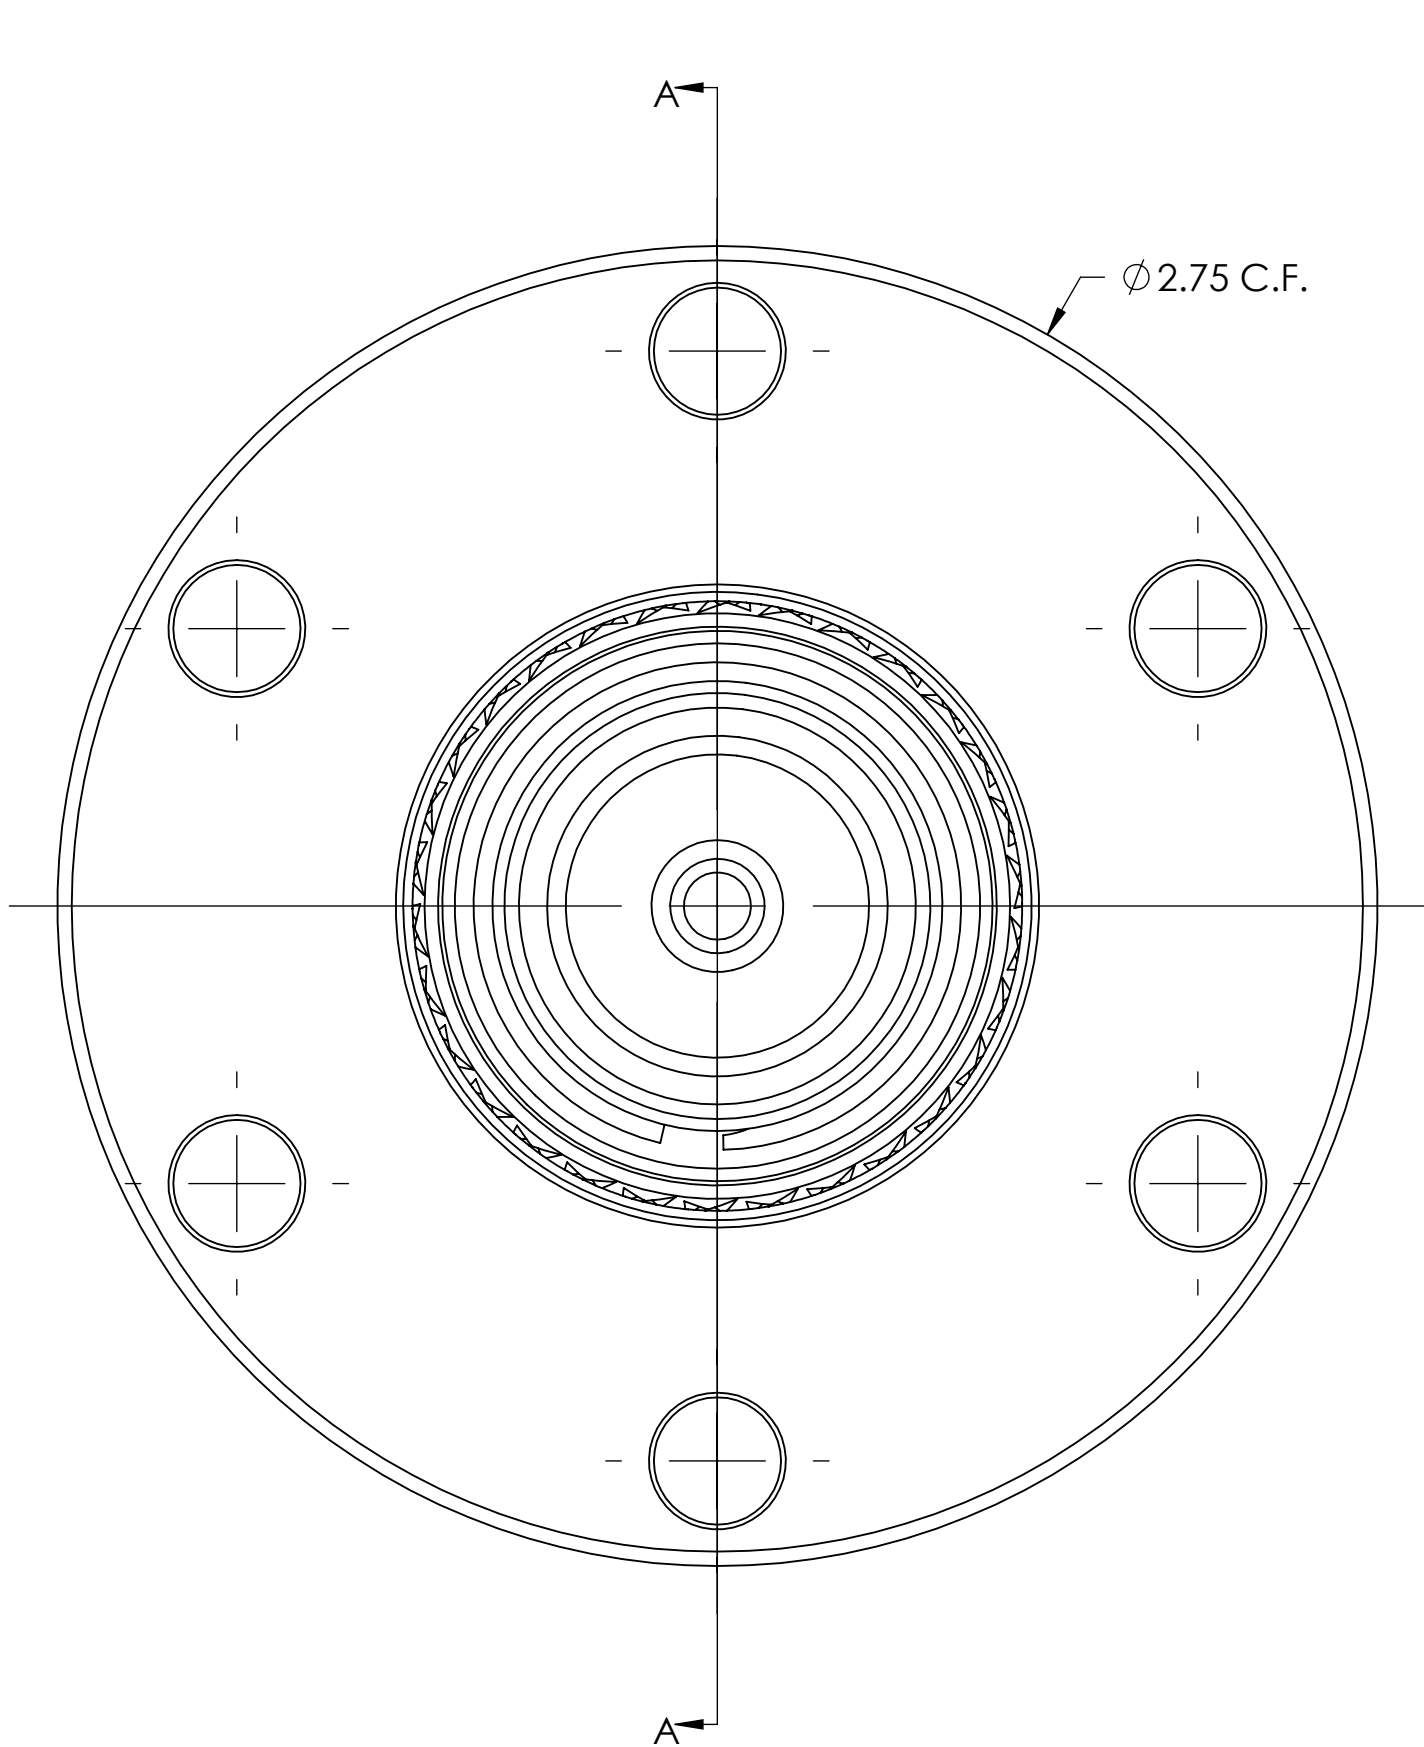


MPF PRODUCTS INC.



SECTION A-A

7/16" DIN Coaxial Feedthrough, 50ohm, DC to 7.5 GHz, 2700 VRMS, 100 Watts 0.275" Copper Conductor, 2.75" Conflat Flange.

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	APPROVED	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC.	
		DRAWN	WJ	9/11/2015		
		CHECKED	WJ	9/11/2015		
		ENG APPR.	WJ	9/11/2015		
MATERIAL		THIRD ANGLE:			7/16" DIN COAXIAL FEEDTHRU, 2700 VRMS DC TO 7.5 GHz, 1 PIN, 275CF	
						
		APPLICATION				
		NEXT ASSY USED ON				
FINISH CONFLAT		SURFACE FINISH: 63 OR BETTER			DOWNLOADED FROM MPFPI.COM	
		UNLESS OTHERWISE SPECIFIED:				
PLATING		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			DWG. NO. A10021-1-CF	
					REV	
		Wednesday, March 09, 2016 11:43:52 AM				