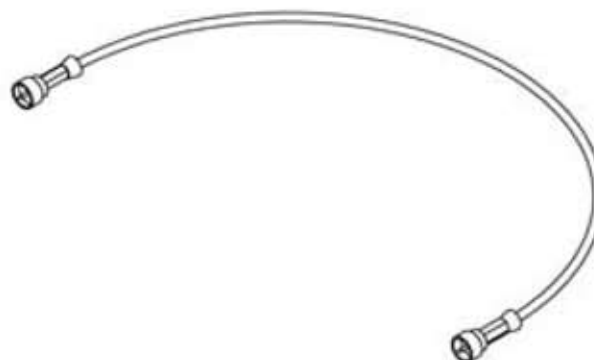


A4863

REV
000001

PART #	LENGTH
1	10"
2	30"
3	12"
4	24"
5	36"

RATINGS:

1. IMPEDANCE: 50 OHMS
2. DIELECTRIC WITHSTANDING VOLTAGE: 1000V RMS AT SEA LEVEL
3. CONTACT RESISTANCE: 3 MILLIOHMS MAX D.C.
4. CURRENT CAPACITY: 3 AMPS D.C.
5. INSULATION RESISTANCE: 5 X 10¹⁰ (-3) MEGAOHMS MIN. AT 500V D.C.
6. VSWR: 1.2 MAX - 2 GHZ
7. TEMPERATURE RATING: -62 °C TO 150 °C

APPROVED

Microdot Coaxial Connector/Cable, In-Vacuum, 500 Volts, 2 Amps

TITLE:
COAXIAL CONNECTOR,
MICRODOT CABLE, IN-VACUUM

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.DIMENSIONS ARE IN INCHES
TOLERANCES:

USED ON:

ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL±.000
±.015FINISH
CABLE

DRAWN BY

JB

DATE

CHECKED

ENG APPR.

JB

DATE

SIZE

A

DWG. NO.

A4863

REV

00/0001

LAST SAVED DATE

Friday, August 03, 2012 8:54:07 AM