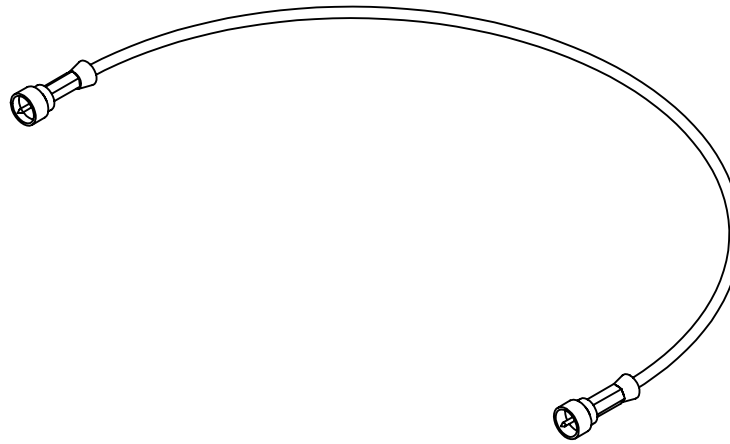


A4863

REV  
8/9/2012

PART #	LENGTH
1	10"
2	30"
3	12"
4	24"
5	36"

## RATINGS:

1. IMPEDANCE: 50 OHMS
2. DIELECTRIC WITHSTANDING VOLTAGE: 1000V RMS AT SEA LEVEL
3. CONTACT RESISTANCE: 3 MILLIOHMS MAX D.C.
4. CURRENT CAPACITY: 3 AMPS D.C.
5. INSULATION RESISTANCE: 5 X 10<sup>(-3)</sup> MEGAOHMS MIN. AT 500V D.C.
6. VSWR: 1.2 MAX - 2 GHZ
7. TEMPERATURE RATING: -62 °C TO 150 °C

APPROVED

Microdot Coaxial Connector/Cable, In-Vacuum, 500 Volts, 2 Amps


TITLE:

COAXIAL CONNECTOR,  
MICRODOT CABLE, IN-VACUUM

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE  
WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.DIMENSIONS ARE IN INCHES  
TOLERANCES:ANGULAR: MACH ± 1/2 °  
TWO PLACE DECIMAL  
THREE PLACE DECIMAL±.030  
±.015FINISH  
CABLE

DRAWN BY

JB

DATE

CHECKED

ENG APPR.

JB

SIZE  
**A**

DWG. NO.

A4863

REV

8/9/2012

LAST SAVED DATE

Friday, August 03, 2012 8:54:07 AM

USED ON:

DO NOT SCALE DRAWING