
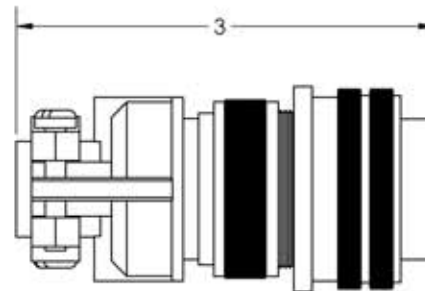


A1070-2-CN

REV
11/18/2013



APPROVED

TEMPERATURE RATING: UP TO 350 °C

MS Series UHV Connector, 4 Pins, 700 Volts, 10 Amps per Pin, Accepts 0.056" or 0.062" Dia Pins

TITLE:

MS CIRCULAR CONNECTOR,
IN-VACUUM, 700V, 28A, 4PIN

PROPRIETARY AND CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED:		MPF PRODUCTS INC.			IN-VACUUM, 700V, 28A, 4PIN			
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.		DIMENSIONS ARE IN INCHES TOLERANCES:		  ±.030 ±.015	FINISH		A	DWG. NO. A1070-2-CN	REV 11/18/2013	
USED ON:		ANGULAR: MACH: 1/2 ° TWO PLACE DECIMAL THREE PLACE DECIMAL			CONNECTOR					
					DO NOT SCALE DRAWING					
					DRAWN BY					
					JB					
					CHECKED					
					ENG APPR.					
					JB					
				LAST SAVED DATE		Monday, November 18, 2013 9:24:31 AM				