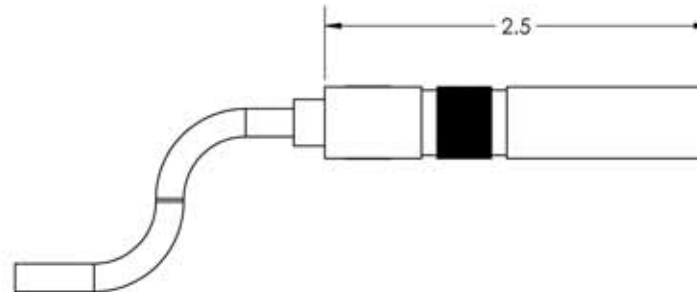


A2459-2-CN

REV
11/18/2013

1. CONNECTOR BODY MOLDED SILICONE RUBBER
PER ZZ-R-765, COLOR -RED IRON OXIDE.
2. CABLE 12 AWG 96" LONG
3. CONTACT, 12 AWG SOCKET, GOLD PLATED.
4. OPERATING TEMPERATURE -55°C TO +125°C.
5. OPERATING VOLTAGE: 25KV.
6. OPERATING CURRENT: 25 AMPS MAX.

APPROVED

High Voltage Power Connector/Cable, 10,000/20,000 Volts, 25 Amps

TITLE:
POWER GLOVE CONNECTOR,
10KV/20KV, SILICONE CABLE, 96"

PROPRIETARY AND CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED:		MPF PRODUCTS INC.					
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH $\pm 1/2^\circ$ TWO PLACE DECIMAL THREE PLACE DECIMAL		FINISH	DRAWN BY	JB	DATE	SIZE	DWG. NO.	REV
			POWER CONNECTOR	CHECKED			A	A2459-2-CN	11/18/2013
USED ON:			DO NOT SCALE DRAWING	ENG APPR.	JB		LAST SAVED DATE	Monday, November 18, 2013 12:31:41 PM	