


A2459-1-CN

REV

11/18/2013

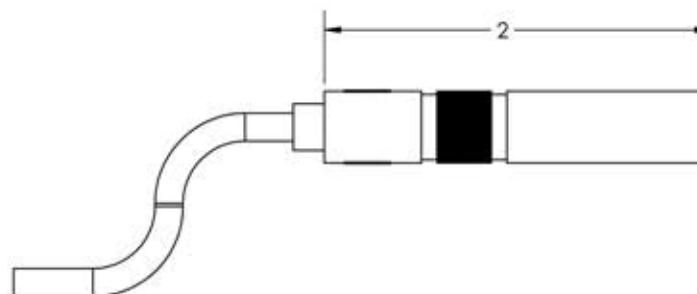

1. CONNECTOR BODY MOLDED SILICONE RUBBER
PER ZZ-R-765, COLOR -RED IRON OXIDE.
2. CABLE 12 AWG 96" LONG
3. CONTACT, 12 AWG SOCKET, GOLD PLATED.
4. OPERATING TEMPERATURE -55°C TO +125°C.
5. OPERATING VOLTAGE: 5KV.
6. OPERATING CURRENT: 25 AMPS MAX.

APPROVED

High Voltage Power Connector/Cable, 5,000 Volts, 25 Amps

TITLE:

POWER GLOVE CONNECTOR,
5KV, SILICONE CABLE, 96"

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.DIMENSIONS ARE IN INCHES
TOLERANCES:ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL± .030
± .015FINISH
POWER CONNECTOR

DRAWN BY

JB

DATE

CHECKED

ENG APPR.

JB

SIZE

A

DWG. NO.

A2459-1-CN

REV

11/18/2013

LAST SAVED DATE

Monday, November 18, 2013 11:24:25 AM