
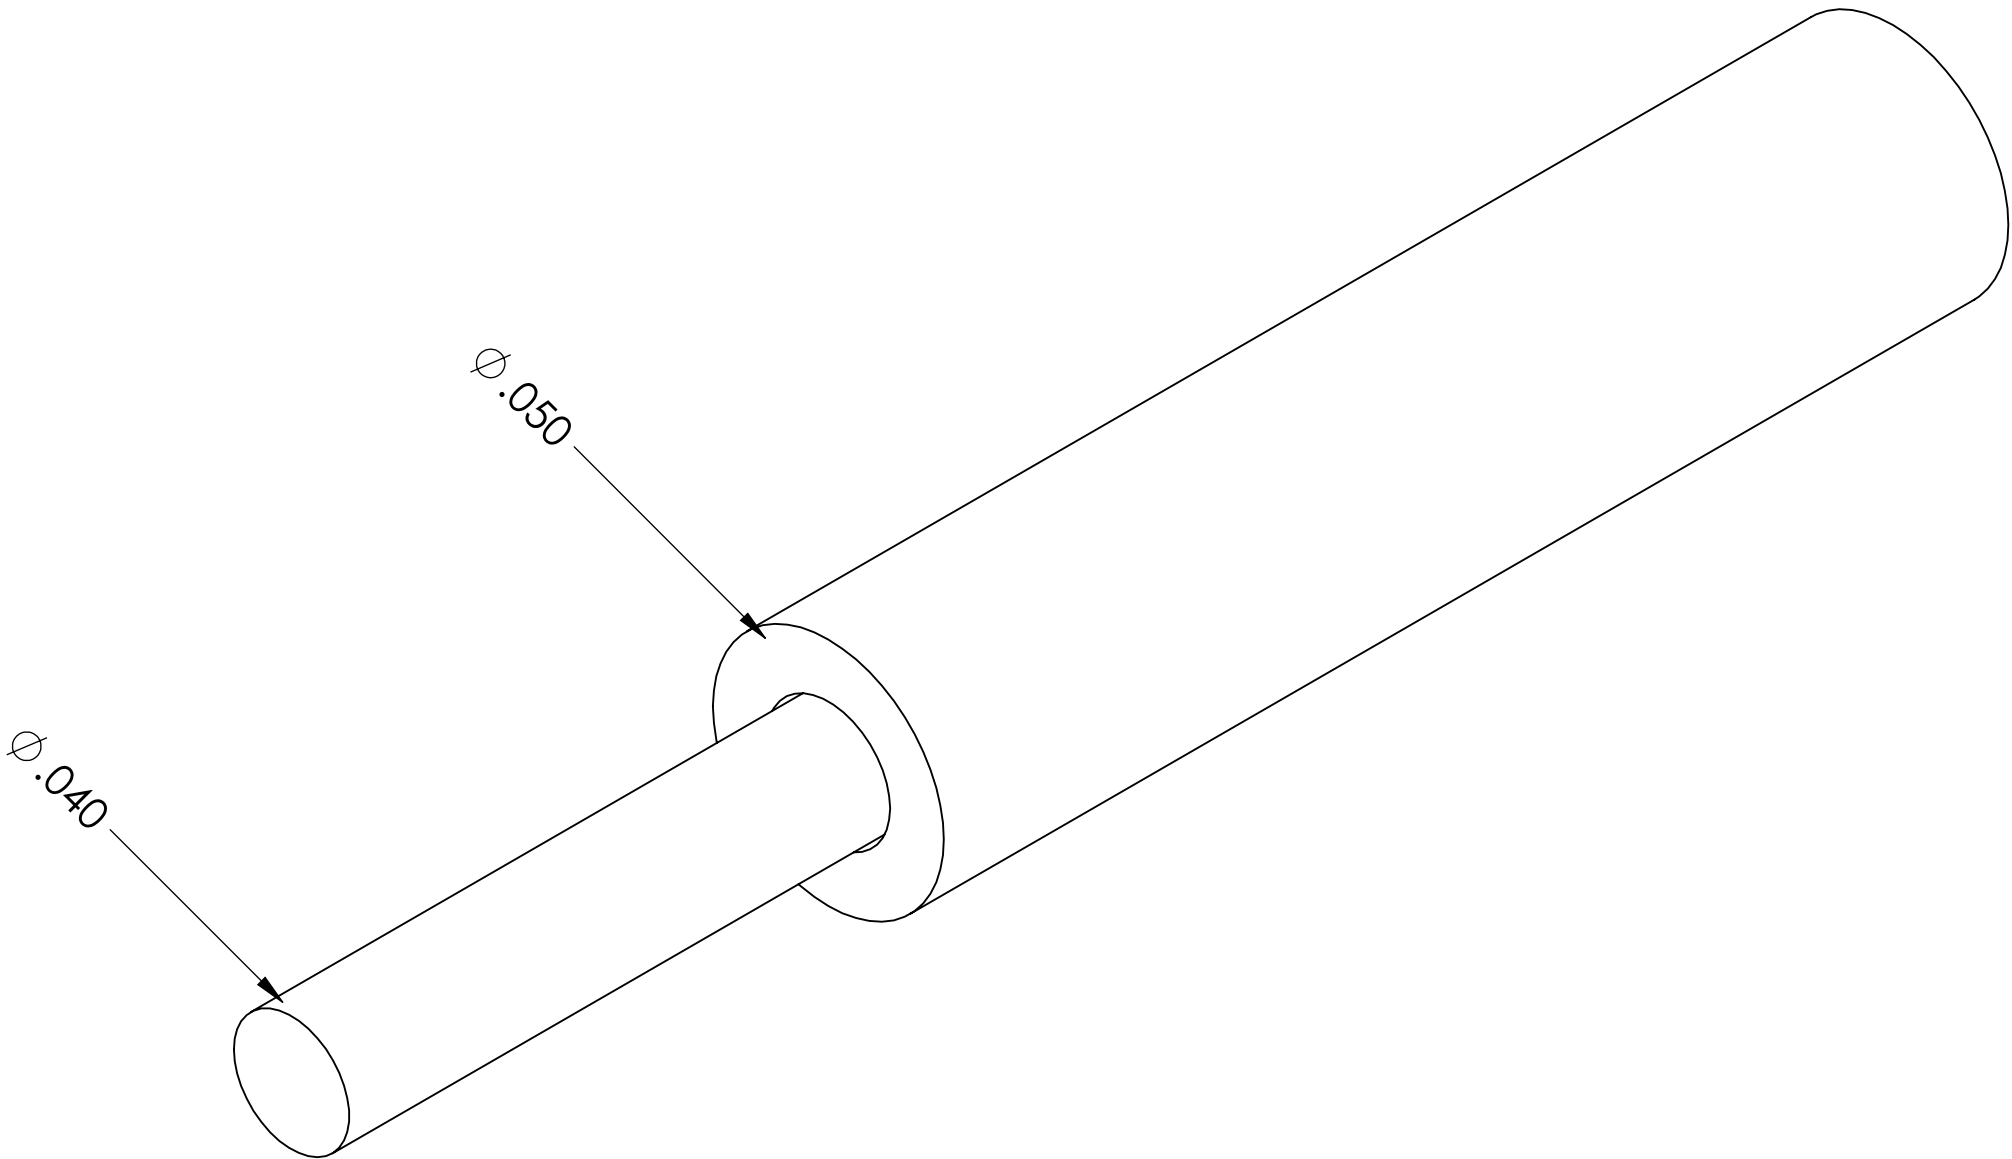



MPF PRODUCTS INC.



- NOTES:
- 1. CABLE LENGTH: 15'
  - 2. WIRE DIAMETER: 0.040
  - 3. INSULATION DIAMETER: 0.050
  - 4. VOLTAGE RATING: 600VAC/2kVDC
  - 5. CURRENT RATING: 14 AMP
  - 6. MINIMUM BEND RADIUS: 0.15"
  - 7. UHV APPLICATIONS: MAXIMUM VACUUM LEVEL  $1 \times 10^{-10}$  TORR
  - 8. TEMPERATURE RANGE: -75°C TO 250°C

Kapton Insulated In-Vacuum Wire, Solid Core, 18 AWG, 0.050" Insulation Dia, 2,000 VDC, 14 Amps, 15' length

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		APPROVED	
DIMENSIONS ARE IN INCHES TOLERANCES:  ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC.  TITLE:  KAPTON WIRE COAXIAL CABLE  DOWNLOADED FROM MPFPI.COM DWG. NO. A2236-6-WR REV
		DRAWN	WJ	11/30/2015	
		CHECKED	WJ	11/30/2015	
		ENG APPR.	WJ	11/30/2015	
MATERIAL		THIRD ANGLE:			
					
		APPLICATION			
		NEXT ASSY      USED ON			
FINISH		SURFACE FINISH:  OR BETTER			
WIRE		UNLESS OTHERWISE SPECIFIED:			
PLATING		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			