


A7326-2-WR

REV

11/18/2013

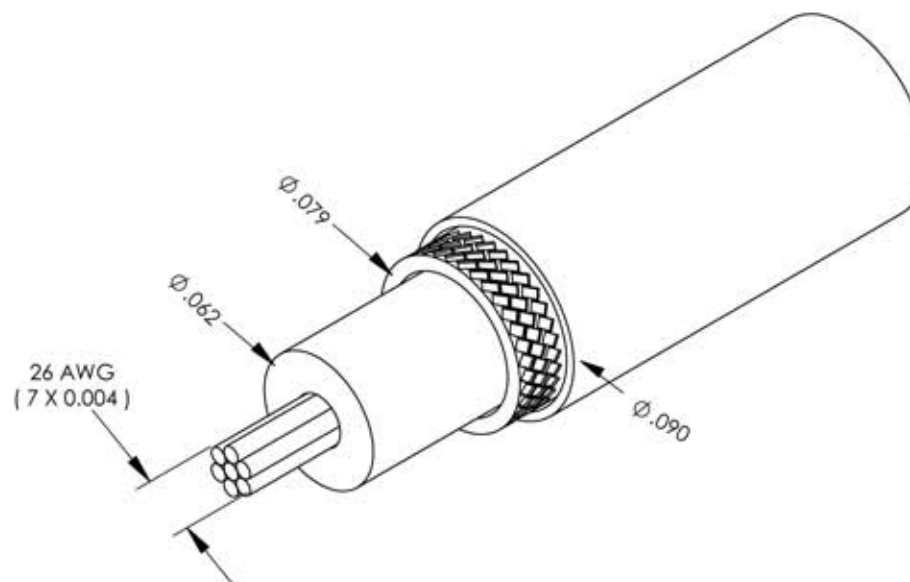

## NOTES:

1. CABLE LENGTH: 15'
2. WIRE DIAMETER: 7 X 0.004
3. RESISTANCE: 353 Ohms/km @ 20 °C MAX
4. VOLTAGE RATING: 600VAC/2kVDC
5. CURRENT RATING: 1.5A
6. MINIMUM BEND RADIUS: 0.45
7. UHV APPLICATIONS
8. TEMPERATURE RANGE: -75 °C TO 250 °C
9. DIELECTRIC CONSTANT: 2.9
10. DIELECTRIC STRENGTH: 80kV/mm
11. DISSIPATION FACTOR, 1MHz: 0.002
12. MOISTURE ABSORPTION: 0.4% @ 50% RH
13. RADIATION RESISTANCE: 109 RADS

APPROVED

TITLE:

**KAPTON WIRE  
COAXIAL CABLE**

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE  
WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

USED ON:

DIMENSIONS ARE IN INCHES  
TOLERANCES:

ANGULAR: MACH ± 1/2 °  
TWO PLACE DECIMAL  
THREE PLACE DECIMAL



± .030  
± .015

FINISH  
**WIRE**

DRAWN BY

JB

DATE

CHECKED

DD

ENG APPR.

JB

SIZE

**A**

DWG. NO.

**A7326-2-WR**

REV

11/18/2013

LAST SAVED DATE

Monday, November 18, 2013 10:34:11 AM