


A2236-5-WR

REV

11/18/2013

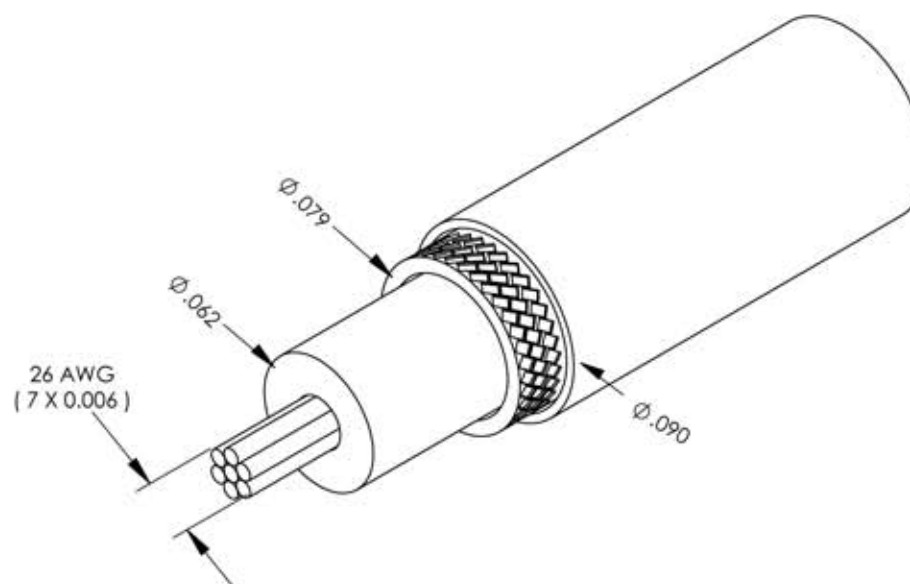

NOTES:

1. CABLE LENGTH: 15'
2. WIRE DIAMETER: 7 X 0.006
3. RESISTANCE: 159 Ohms/km @ 20 °C MAX
4. VOLTAGE RATING: 600VAC/2kVDC
5. CURRENT RATING: 3.0A
6. MINIMUM BEND RADIUS: 1.05
7. UHV APPLICATIONS
8. TEMPERATURE RANGE: -75 °C TO 250 °C
9. DIELECTRIC CONSTANT: 2.9
10. DIELECTRIC STRENGTH: 80kV/mm
11. DISSIPATION FACTOR, 1MHz: 0.002
12. MOISTURE ABSORPTION: 0.4% @ 50% RH
13. RADIATION RESISTANCE: 109 RADS

APPROVED

TITLE:

KAPTON WIRE
COAXIAL CABLE

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:

USED ON:

ANGULAR: MACH ± 1/2 °
TWO PLACE DECIMAL
THREE PLACE DECIMAL± .030
± .015FINISH
WIRE

DRAWN BY

JB

DATE

CHECKED

DD

DO NOT SCALE DRAWING

ENG APPR.

JB

SIZE
A

DWG. NO.

A2236-5-WR

REV

11/18/2013

LAST SAVED DATE

Monday, November 18, 2013 10:30:00 AM