

Specifications

Sealing Mechanism: Welded Bellows

Material Exposed to Vacuum: Stainless Steel

Bakeout Temperature: 315°C

Operating Temperature: -20° to 315°C

Pressure Range: Atmosphere to 1 x 10⁻¹¹ Torr

Position Lock: Thumb Screw

Maximum Axial Load: 10 lbs. (4.5 kg) concentric load

Maximum Lateral Load: 5 lbs. (2.3 kg) @tip in ret. Position


Scale Resolution:

Linear: 0.05" (1 mm)

Dial: .002" (.05 mm)

Thread Pitch: .05" (1.3 mm) per revolution

THIS DRAWING IS THE PROPERTY OF HUNTINGTON MECHANICAL LABS, INC., AND IS PROPRIETARY IN GENERAL AND IN DETAIL. IT SHALL NOT BE MODIFIED IN ANY WAY. PERMISSION IS GIVEN TO PRINT AND DISSEMINATE FREELY.

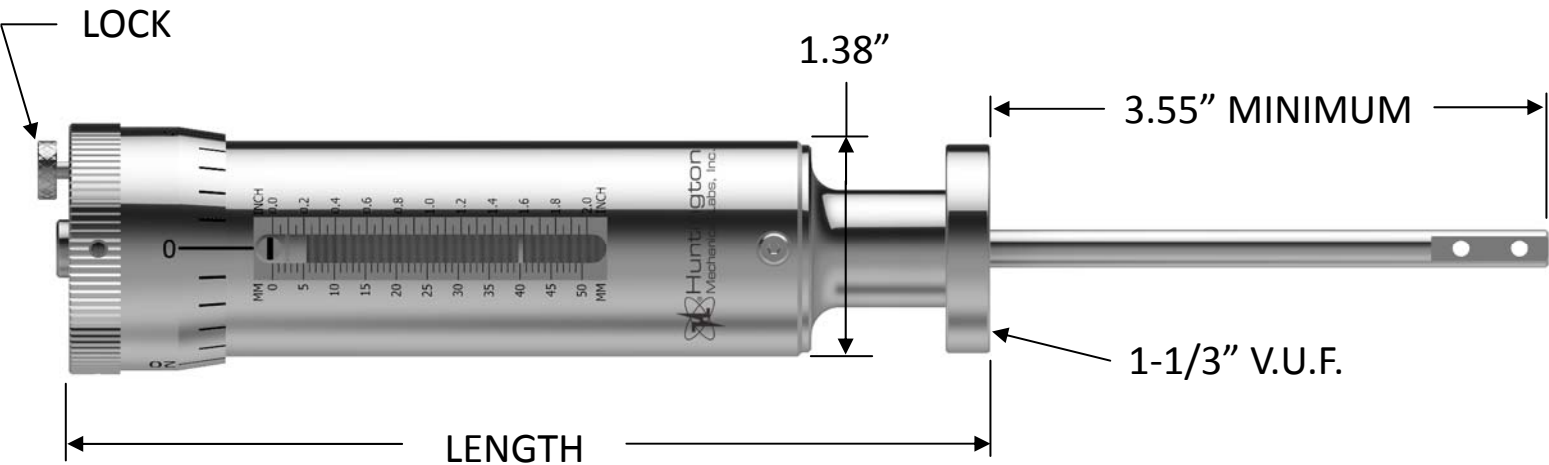

L-2111-X-A -HT Series



Features

All Stainless Steel construction for high temperature or adverse condition environments.

Dimensions: inches (mm)

L-SERIES MANUAL MINI LINEAR, HI-TEMP

FLANGE	STROKE	LENGTH	WEIGHT (lbs.)	HI-TEMP MINI PART NUMBER
1 ¹ / ₃ "	1.0 (25.4)	4.47 (113.5)	1.0	L-2111-1-HT
	2.0 (50.8)	5.85 (148.6)	1.5	L-2111-2-HT
	4.0 (101.6)	8.61 (218.7)	2.5	L-2111-4-HT
2 ³ / ₄ "	1.0 (25.4)	4.47 (113.5)	1.5	L-2111-1-A-HT
	2.0 (50.8)	5.85 (148.6)	2.0	L-2111-2-A-HT
	4.0 (101.6)	8.61 (218.7)	3.0	L-2111-4-A-HT



Other stroke lengths & flange options available. For quotes, please call 800-227-8059 or visit our website at www.huntvac.com. Email: vacman@huntvac.com



13355 NEVADA CITY AVENUE
GRASS VALLEY, CA. 95945

FEEDTHRU, LINEAR, HI-TEMP,
.05 LEAD, DIAL, US STD. W/SCALE

B

DWG. NO. L-2111-X-HT OUTLINE

REV. -

SCALE: NO SCALE

SHEET: 1

OF 1