



THIS DRAWING IS THE PROPERTY OF HUNTINGTON MECHANICAL LABS, INC., AND IS PROPRIETARY IN GENERAL AND IN DETAIL. IT SHALL NOT BE MODIFIED IN ANY WAY. PERMISSION IS GIVEN TO PRINT AND DISSEMINATE FREELY.


L-2220-X-SF Series

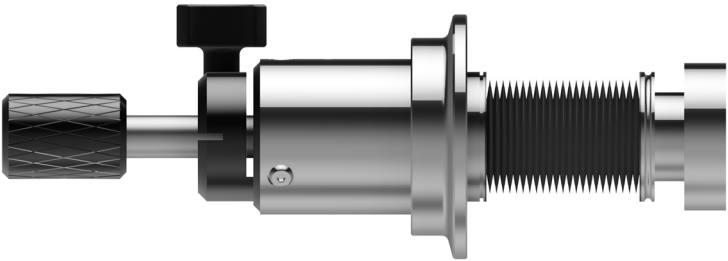


STANDARD

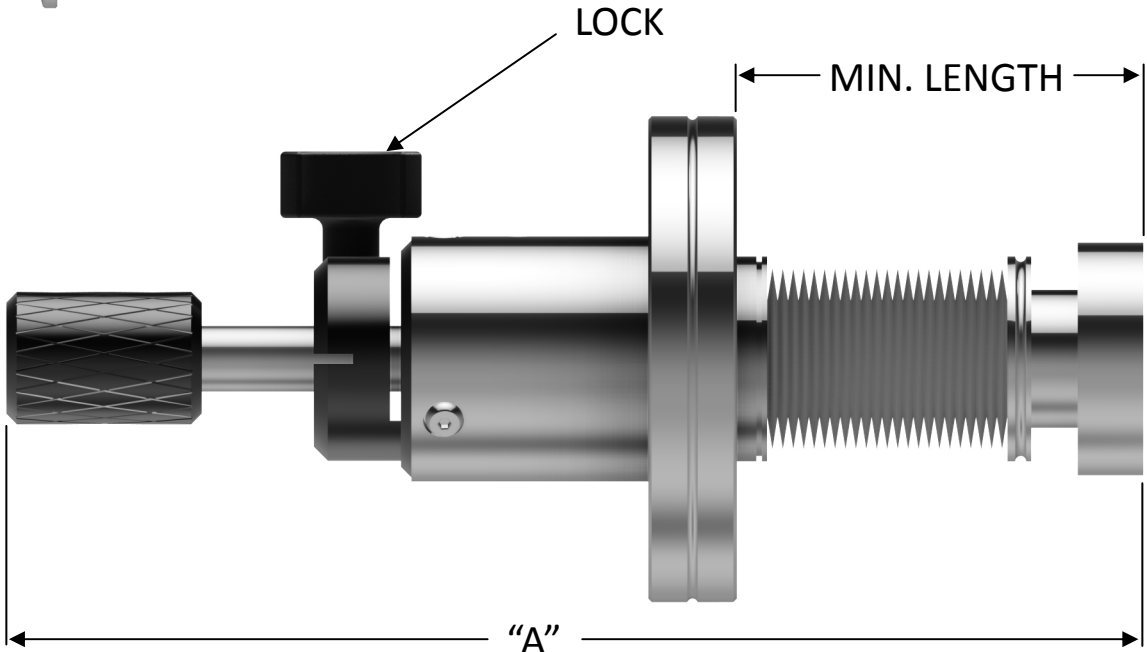

HOLLOW TUBE

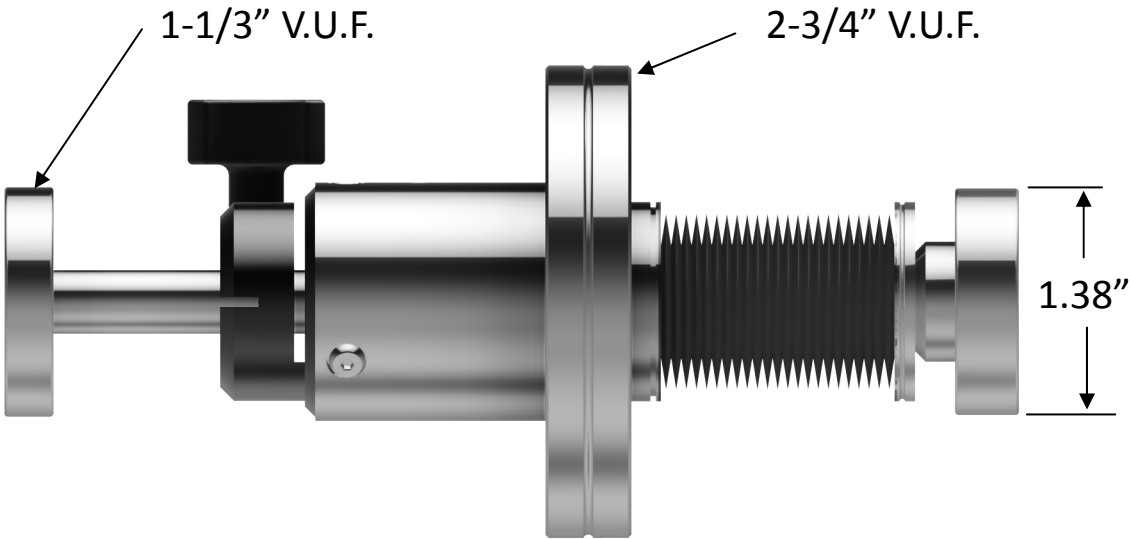


L-2220-X-T-SF Series

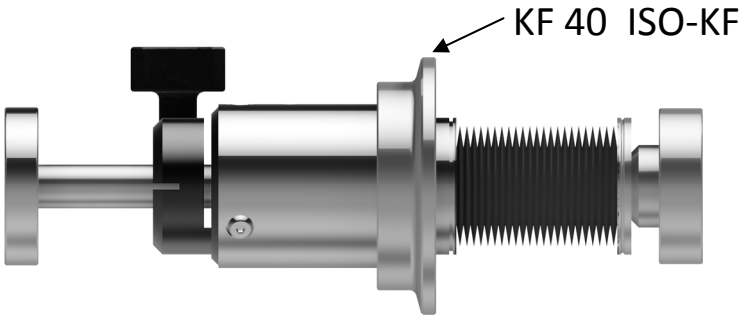


KF 40 ISO-KF


STANDARD STYLE

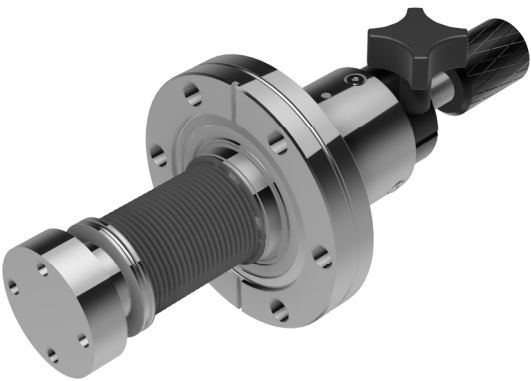

HOLLOW TUBE STYLE

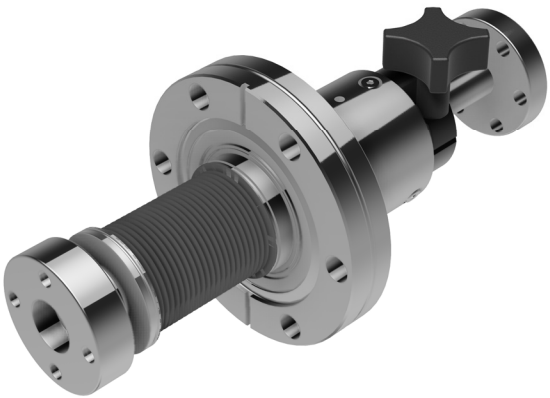

#10-32 UNF-2B
X4 @ 1" B.C.

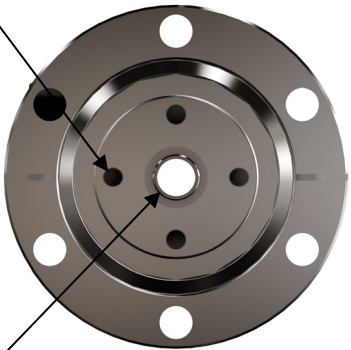

Ø .30" THRU
(HOLLOW TUBE ONLY)
END VIEW

Dimensions: inches (mm)

L-SERIES LINEAR - COMPACT, STD. & HOLLOW TUBE

FLANGE	STROKE	LENGTH "A"	MINIMUM LENGTH	WEIGHT (lbs.)	STANDARD PART NUMBER	HOLLOW TUBE PART NUMBER
2 ³ / ₄ "	1.0 (25.4)	5.83 (148.1)	1.30 (33.0)	2.5	L-2220-1	L-2220-1-T
	2.0 (50.8)	7.21 (183.1)	1.68 (42.7)	2.5	L-2220-2	L-2220-2-T
	4.0 (101.6)	9.97 (253.2)	2.44 (62.0)	3.0	L-2220-4	L-2220-4-T
KF 40	1.0 (25.4)	5.83 (148.1)	1.30 (33.0)	2.3	L-2220-1-SF	L-2220-1-T-SF
	2.0 (50.8)	7.21 (183.1)	1.68 (42.7)	2.5	L-2220-2-SF	L-2220-2-T-SF
	4.0 (101.6)	9.97 (253.2)	2.44 (62.0)	2.8	L-2220-4-SF	L-2220-4-T-SF

Other options available. For quotes, please call 800-227-8059
or visit our website at www.huntvac.com. Email: vacman@huntvac.com

Specifications

Sealing Mechanism: Welded Bellows
Material Exposed to Vacuum: Stainless Steel
Bakeout Temperature: 200°C (Maximum)
Operating Temperature: -20° to 150°C

Pressure Range: Atmosphere to 1 x 10⁻¹¹ Torr
Position Lock: Hand Knob
Maximum Axial Load: 25 lbs. (11.3 kg) concentric load
Maximum Lateral Load: 20 lbs. (9.1 kg) @tip in retracted (minimum) position



13355 NEVADA CITY AVENUE
GRASS VALLEY, CA. 95945

FEEDTHRU, LINEAR, 2220 SERIES
STD. & HOLLOW TUBE, US STD.

B	DWG. NO.	REV.
	L-2220-X-(T)-(SF) OUTLINE	-
SCALE: NO SCALE		SHEET: 1 OF 1