
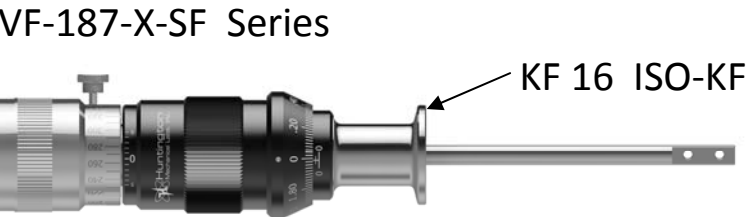
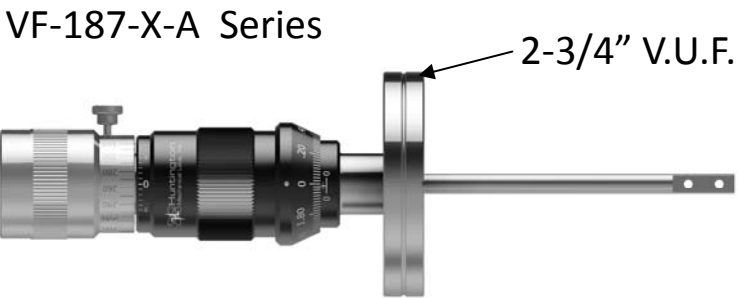


Specifications


Sealing Mechanism: Welded Bellows
Material Exposed to Vacuum: Stainless Steel
Bakeout Temperature: 200°C (Maximum)

Operating Temperature: -20° to 100°C
Pressure Range: Atmosphere to 1 x 10⁻¹¹ Torr
Position Lock: Radial: Lock Screw Linear: Hand Knob
Maximum Axial Load: 20 lbs. (9.1 kg) concentric load
Rotary Resolution (Vernier): 1°

THIS DRAWING IS THE PROPERTY OF HUNTINGTON MECHANICAL LABS, INC., AND IS PROPRIETARY IN GENERAL AND IN DETAIL. IT SHALL NOT BE MODIFIED IN ANY WAY. PERMISSION IS GIVEN TO PRINT AND DISSEMINATE FREELY.

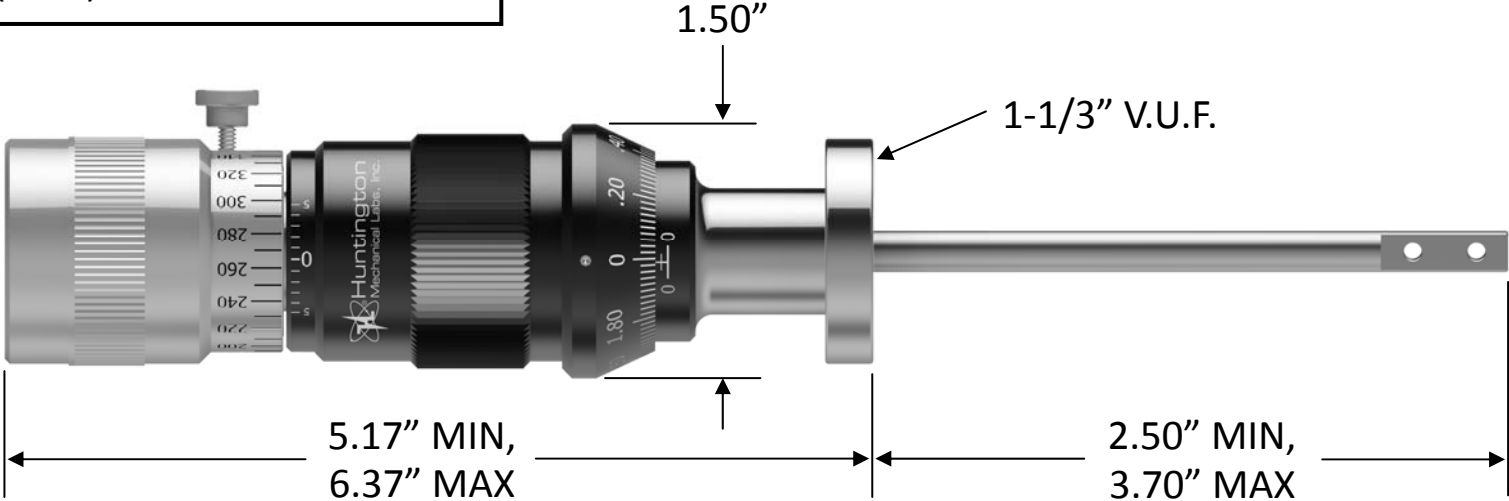

SHAFT TIP DETAIL

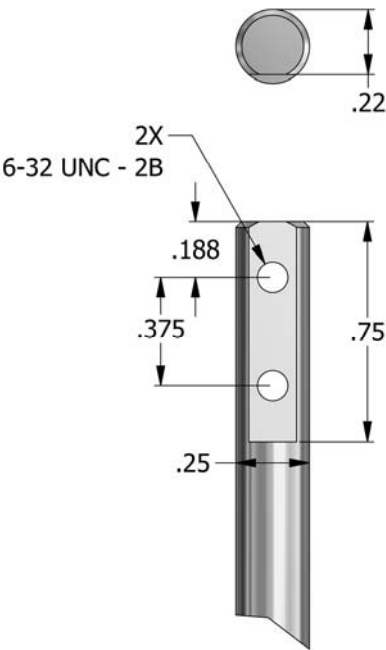

Dimensions: inches (mm)

MANUAL ROTARY / LINEAR FEEDTHROUGH

FLANGE	LINEAR TRAVEL	WEIGHT (lbs.)	PART NUMBER
1 1/3"	1.20 (30.0)	1.2	VF-187
2 3/4"	1.20 (30.0)	1.7	VF-187-A
KF 16	1.20 (30.0)	1.2	VF-187-SF

Other stroke lengths & flange options available. For quotes, please call 800-227-8059 or visit our website at www.huntvac.com. Email: vacman@huntvac.com



13355 NEVADA CITY AVENUE
GRASS VALLEY, CA. 95945

FEEDTHRU, ROTARY-LINEAR
.25" SHAFT, US STD. 1.20" TRAVEL

B

DWG. NO. VF-187-(A)-(SF) OUTLINE

REV. -

SCALE: NO SCALE

SHEET: 1

OF 1