

THIS DRAWING IS THE PROPERTY OF HUNTINGTON MECHANICAL LABS, INC., AND IS PROPRIETARY IN GENERAL AND IN DETAIL. IT SHALL NOT BE MODIFIED IN ANY WAY. PERMISSION IS GIVEN TO PRINT AND DISSEMINATE FREELY.

Specifications

Sealing Mechanism: Welded Bellows

Bellows ID: 1.50" (38.9 mm)

Bakeout Temperature: 300°C (Bellows only)

Operating Temp: -20° to 150°C

Pressure Range: Atmosphere To 1×10^{-11} Torr


X-Y Motion: +/- 12.5 mm or .5"

Position Resolution (Micrometer):

.002 mm or .0001"



4x 1-1/3" BLANK FLANGES
MOUNTED TO 6" BOTTOM FLANGE

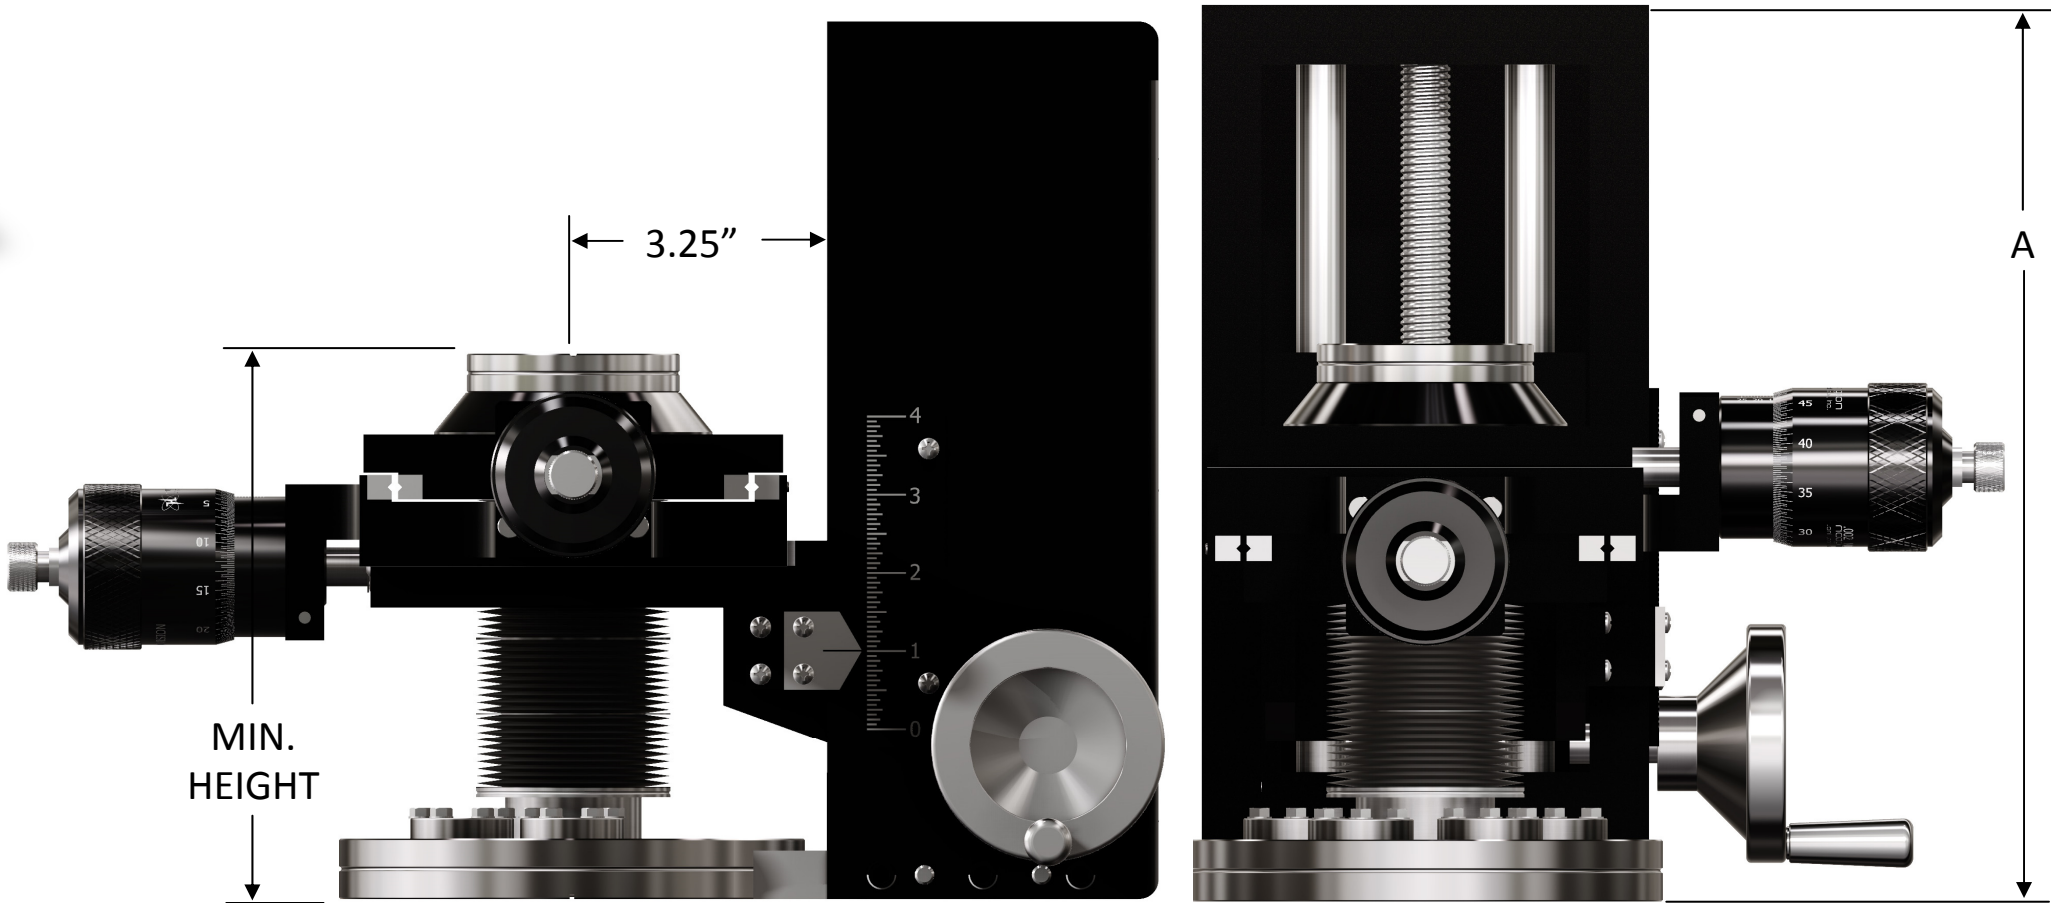

Dimensions: inches (mm)

X - Y - Z MANIPULATOR w/MULTIPORT FLANGE

STROKE	MINIMUM HEIGHT	A	WEIGHT (lbs.)	PART NUMBER
2.0	6.85	9.35	40.1	PM-275-600
4.0	6.85	11.35	40.7	PM-275-600-4
6.0	7.60	14.10	42.7	PM-275-600-6
8.0	8.50	16.90	44.7	PM-275-600-8

Other stroke lengths & motorized options available. For quotes, please call 800-227-8059 or visit our website at www.huntvac.com. Email: vacman@huntvac.com

 Huntington Mechanical Labs, Inc.		13355 NEVADA CITY AVENUE GRASS VALLEY, CA. 95945	
MANIPULATOR, X-Y-Z AXIS MULTI-PORT MOUNT, W/SCALE			
B	DWG. NO. PM-275-600-X OUTLINE	REV. -	
SCALE: NO SCALE		SHEET: 1	OF 1