


## MPF PRODUCTS INC

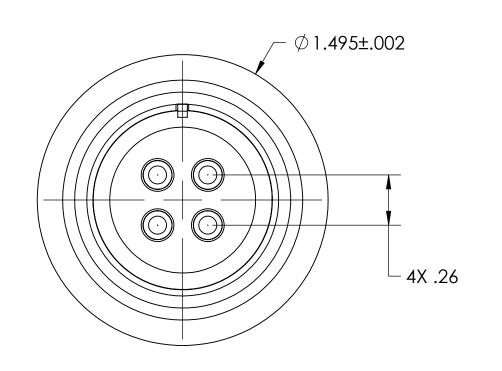

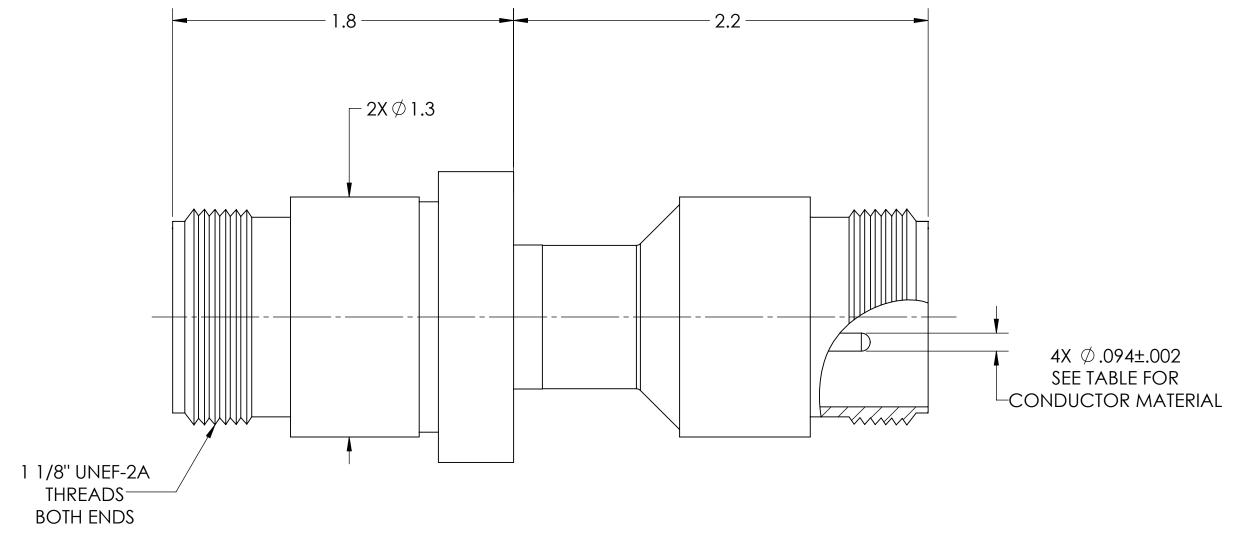

PART #	CONNECTORS	AIRSIDE CONN.	CONN. QUANTITY	VACUUM SIDE CONN.	CONN. QUANTITY	COND. MATERIAL	AMP RATING
A15661-1-W	YES	A5104-1-CN	1	A15649-1-CN	1	MOLYBDENUM	28 AMPS
A15661-2-W	NO	N/A	N/A	N/A	N/A	MOLYBDENUM	28 AMPS
A15661-3-W	YES	A5104-1-CN	1	A15649-1-CN	1	NICKEL	16 AMPS
A15661-4-W	NO	N/A	N/A	N/A	N/A	NICKEL	16 AMPS

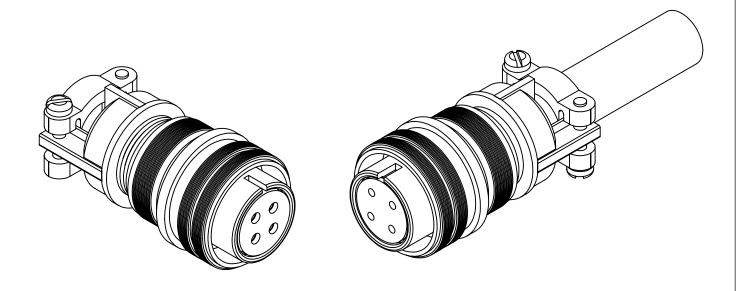

UNLESS OTHERWISE SPECIFIED:	QUOTATION #			N/A	APPROVED	)
DIMENSIONS ARE IN INCHES		NAME	DATE	AADE DDODLIGTS		NIC
TOLERANCES:	DRAWN	WJ	9/11/2015	N	MPF PRODUCTS IN	
ANICHI AD. AAA CH . 1/0°	CHECKED	WJ	9/11/2015	TITL	.E:	
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015			
THREE PLACE DECIMAL ± .015  MATERIAL	THIRD ANGLE:			4 PIN, 700 VOLTS. DOUBLE ENDED,		
				WELDABLE		
	APPLICATION  NEXT ASSY  USED ON			-		
				DOV	WNLOADED FROM MPFPI.CC	M
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO.	REV
PLATING	UNLESS OTHERWISE SPECIFIED:				A15661	
T D (III)	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			Wednesday, October 19, 2016 9:47:05 AM		

MS High Current Series, Double Ended, Multipin Feedthrough, 4 Pins, 700 Volts 0.094" Conductors, 1.50" Diameter Stainless Steel Weld Adapter