
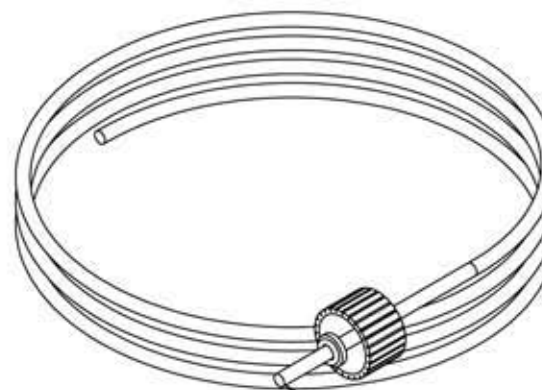


A2608

REV

1/16/2012

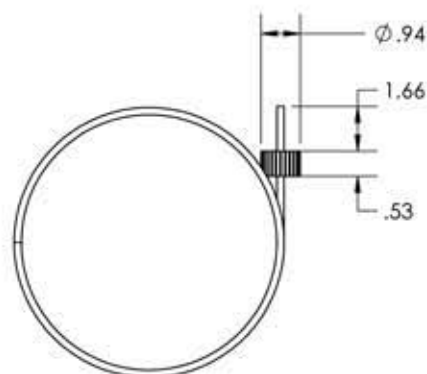

SOCKET CONTACT ACCEPTS .062 PIN

NOTES:

VOLTAGE -40KV
 MAXIMUM CURRENT- 10 AMPS
 OPERATING TEMPERATURE -55°C TO +125°C
 COUPLING NUT-POLYCARBONATE
 FRICTION WASHER-WHITE TEFLON
 O-RING-SILICONE
 WIRE- 16 AWG WITH WHITE SILICONE INSULATION

APPROVED

TITLE:

40KV CABLE
 8 FEET LONG

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED:

MPF PRODUCTS INC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
 WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.
 NEXT ASSEMBLY USED ON:

DIMENSIONS ARE IN INCHES
 TOLERANCES:

ANGULAR: MACH ± 1/2°
 TWO PLACE DECIMAL
 THREE PLACE DECIMAL



± .030
 ± .015

FINISH
 CABLE

DRAWN BY

JB

DATE

05/03/2010

CHECKED

WJ

05/03/2010

ENG APPR.

JB

05/03/2010

DO NOT SCALE DRAWING

SIZE

A

DWG. NO.

A2608

REV

1/16/2012

LAST SAVED DATE

Monday, January 16, 2012 9:02:43 AM