
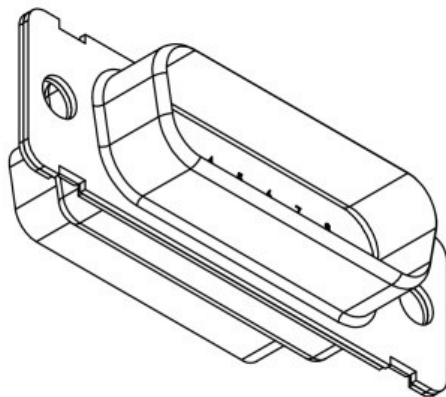
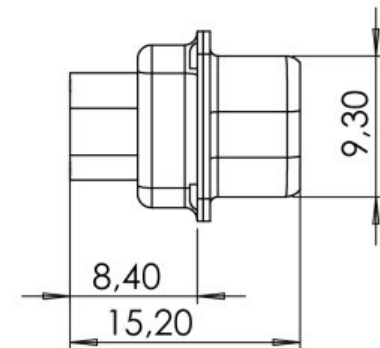


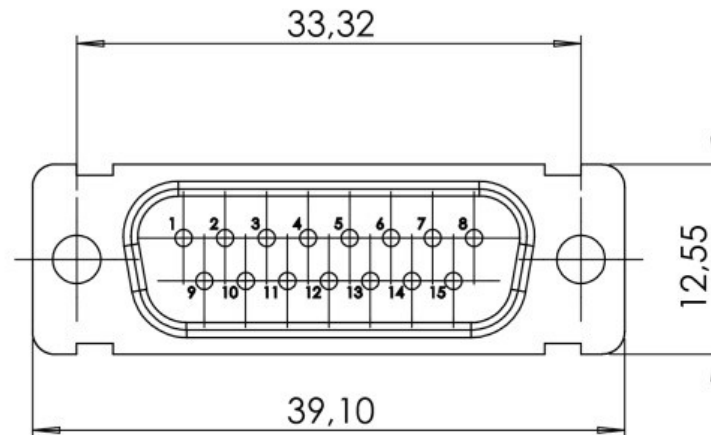

Bemerkungen (Remarks)				imported from STP											
All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allelectra GmbH.				Freimaßtoleranz (Standard Toleranz)		Maßstab (Scale)		Funktionsmerkmale nach ISO/TS 16949 (functional featur after ISO/TS 16949)		Rauheit (Rougness) $\sqrt{Rz\ 16\ (Rz\ 6,3)}$		europ.Projektion 			
				DIN ISO 2768 f-H		2:1		Material, Standard Oberfläche (Treatment)		Material <nicht festgelegt>		Kanten (edges)  			
				Design		Datum		Name		Bezeichnung (Title) Connector 15 pin Sub-D male for High Vacuum		Gewicht (weight)		g	
				Drawn		28.06.2013		JB				0.00			
				Check											
										Page:		Pages:			
										1		1			
												Revision			
												00			
00															
Index				Modification		Datum		Name				Format A4			

allelectra

Zeichnungsnummer (Drawing No.) 211-MS15-HV



Datei (File) F:\Products\SEC02\211\211\F:\Products\SEC02\211\

Dimensions of HV Sub-D Connectors

Standard HV dimensions are identical to their air side equivalents.
This list provides the maximum outer dimensions of the connector.

	<i>Part Code</i>	<i>A</i>	<i>B</i>	<i>C</i>
9-pin	211-FS09-HV	30.8	12.6	15.5
9-pin SMALL	211-FS09-HV-SX	18.2	12.6	15.5
15-pin	211-FS15-HV	39.2	12.6	15.5
25-pin	211-FS25-HV	53.1	12.6	15.5
37-pin	211-FS37-HV	69.3	12.6	15.5
50-pin	211-FS50-HV	67	15.4	15.5

all dim. in mm

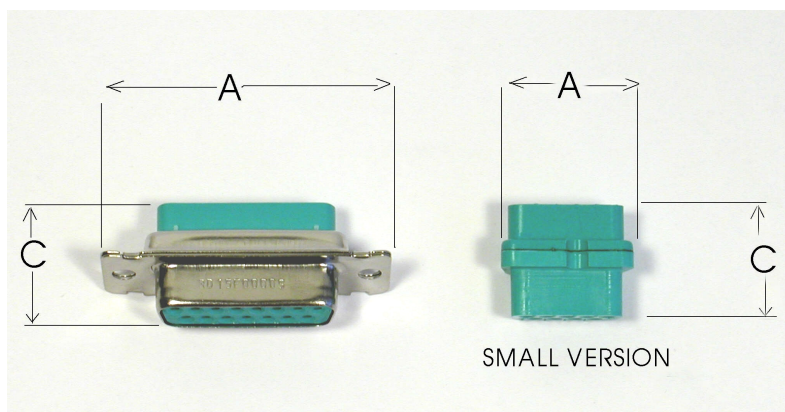

Last revised 2017-07-21

All data given in this sheet is carefully checked but is subject to change at any time.

File: 211 HV Connectors